



aci Acoustical Consultants Inc.
5031 – 210 Street
Edmonton, Alberta, Canada T6M 0A8
Phone: (780) 499-1591
www.aciacoustical.com


Environmental Noise Impact Assessment
For The

**Noise Attenuation City Wide Data Collection
Phase 2**

Boudreau Road

**Hebert Road
to
Campbell Road**

Prepared for:
The City of St. Albert

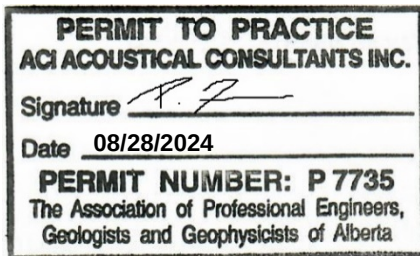

08/28/2024

Prepared by:
P. Froment, B.Sc., B.Ed., P.L.(Eng.)
aci Acoustical Consultants Inc.
Edmonton, Alberta
APEGA Permit to Practice #P7735

**aci Project #: 19-065
August 28, 2024**

Disclaimer

This report has been prepared by **aci** Acoustical Consultants Inc. (**aci**) in response to a specific request for service from, and for the exclusive use of, the Client to whom the report is addressed. The report has been prepared in a manner consistent with a level of care and skill ordinarily exercised by members of the engineering and science professions currently practising under similar conditions in the jurisdiction in which the services are provided, subject to the time limits and physical constraints applicable to this report. The findings contained in this report are based, in part, upon information provided by others. **aci** does not vouch for the accuracy of information provided by others or how that may impact the accuracy of the results presented in the report. The information contained in this report is not intended for use of, nor is it intended to be relied upon, by any person, firm, or corporation other than the Client to whom it is addressed, with the exception of the applicable regulatory authority to whom this document may be submitted. Any, calculation methods and noise models prepared by **aci** are considered proprietary professional work product and shall remain the copyright property of **aci** who authorizes only the Client to use and make copies of the report.

The report is of a summary nature and is not intended to stand alone without reference to the instructions given to **aci** by the Client, communications between **aci** and the Client, and to any other reports prepared by **aci** for the Client relative to the specific project described in the report. In order to properly understand the suggestions, recommendations, and opinions expressed in this report, reference must be made to the whole of the report. **aci** cannot be responsible for use of portions of the report without reference to the entire report. **aci** accepts no liability or responsibility for any damages that may be suffered or incurred by any third party as a result of the use of, reliance on, or any decision made based on this report.

Unless otherwise stated, the suggestions, recommendations, and opinions given in this report are intended only for guidance of the Client in the design of the specific project. The extent and detail of investigations, necessary to determine all of the relevant conditions which may affect potential project construction costs would normally be greater than has been carried out for design purposes. Any Contractors bidding on, or undertaking work discussed in this report, should rely on their own investigations, as well as their own interpretations of the factual data presented in the report, including but not limited to proposed construction techniques, materials selected, schedule, safety and equipment capabilities.

Executive Summary

aci Acoustical Consultants Inc., of Edmonton AB, was retained by the City of St. Albert (the City) AB, to complete their Noise Attenuation City Wide Data Collection Phase 2 Study (the Project). As part of the Project **aci** conducted 24-hour environmental noise monitoring at various residential locations throughout the City in 2021 and again, specifically for this study area in 2024. From the initial 2021 monitoring data, specific locations within the City were categorized as high priority for future investigations for noise mitigation. This report is specific to the residents adjacent to Boudreau Road between Campbell Road and Hebert Road. Site work was conducted for **aci** in October 2021 & June 2024 by P. Froment, B.Sc., B.Ed., P.L.(Eng.).

As part of the study a total of four (4) 24-hour environmental noise monitorings were conducted within the study area. The locations of the monitors were selected to represent the varying noise climate within the study area. The results of the baseline noise monitoring indicated sound levels ranging from 57.0 dBA, to 62.0 dBA L_{eq24} .

The results of the Baseline Case noise modeling resulted in similar values to the monitoring results. The modeled noise levels ranged from 55.8 to 62.4 dBA which is below the City of St. Albert's limit of 65 dBA L_{eq24} .

The Future Case noise model without mitigation with projected traffic volumes that cause an exceedance indicated noise level ranging from 58.4 – 65.0 dBA L_{eq24} for all locations. To achieve this, 2022 traffic volumes were multiplied by 1.8.

The Future Case noise modeling with mitigation (in the form of a 1.83 m noise barrier) resulted in L_{eq24} noise levels ranging from 55.3 – 60.2 dBA which is below the City of St. Albert's limit of 65 dBA L_{eq24} . Relative to the Future case modeling scenario without mitigation, the decrease in noise levels ranged from (-)1.3 dBA to (-)5.8 dBA.

Table of Contents

1.0	Introduction	1
2.0	Location Description	1
3.0	Measurement Methods	2
4.0	Computer Noise Modeling	3
4.1.	Computer Noise Modeling Software.....	3
4.2.	Noise Modeling Scenarios.....	4
4.3.	Noise Modeling Parameters	4
4.4.	Modeling Confidence	5
5.0	Permissible Sound Levels	6
6.0	Results and Discussion	7
6.1.	Environmental Monitoring	7
6.2.	Computer Noise Modelling.....	9
6.2.1.	Baseline Case (2021) Scenario.....	9
6.2.2.	Future Case Scenario.....	10
6.2.3.	Future Case Scenario with 1.83 m Barrier	11
7.0	Conclusion.....	12
8.0	References	13
Appendix I	MEASUREMENT EQUIPMENT USED.....	14
Appendix II	THE ASSESSMENT OF ENVIRONMENTAL NOISE (GENERAL)	21
Appendix III	SOUND LEVELS OF FAMILIAR NOISE SOURCES	33
Appendix IV	NOISE MODELING PARAMETERS	35
Appendix V	DATA REMOVAL	36
Appendix VI	WEATHER DATA	38

List of Tables

Table 1. Leq 24-hour results.....	7
Table 2. Baseline Case Noise Modeling Results at Noise Monitor Location	9
Table 3. Baseline Case Noise Modeling Results.....	9
Table 4. Future Case Noise Modeling Results	10
Table 5. Future Case Noise Modeling Results	11

List of Figures

Figure 1. Study Area	1
Figure 2. Noise Monitor (60 Aspen Crescent)	2
Figure 3. Noise Monitor (44 Andrew Crescent).....	2
Figure 4. Noise Monitor (15 Patterson Crescent).....	3
Figure 5. Noise Monitor (52 Andrew Crescent).....	3
Figure 6. Noise Monitor (60 Aspen Crescent) – 15-Second L_{eq24} Sound Levels	4
Figure 7. Noise Monitor (60 Aspen Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels	4
Figure 8. Noise Monitor (44 Andrew Crescent) – 15-Second L_{eq24} Sound Levels.....	5
Figure 9. Noise Monitor (44 Andrew Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels	5
Figure 10. Noise Monitor (15 Patterson Crescent) – 15-Second L_{eq24} Sound Levels.....	6
Figure 11. Noise Monitor (15 Patterson Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels	6
Figure 12. Noise Monitor (52 Andrew Crescent) – 15-Second L_{eq24} Sound Levels.....	7
Figure 13. Noise Monitor (52 Andrew Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels	7
Figure 14. Baseline Case L_{eq24} Noise Levels (West)	8
Figure 15. Baseline Case L_{eq24} Noise Levels (East)	9
Figure 16. Future Case L_{eq24} Noise Levels (West)	10
Figure 17. Future Case L_{eq24} Noise Levels (East).....	11
Figure 18. Future Case with Mitigation L_{eq24} Noise Levels (West)	12
Figure 19. Future Case with Mitigation L_{eq24} Noise Levels (East).....	13

1.0 Introduction

aci Acoustical Consultants Inc., of Edmonton AB, was retained by the City of St. Albert (the City) AB, to complete their Noise Attenuation City Wide Data Collection Phase 2 Study (the Project). As part of the Project aci conducted 24-hour environmental noise monitoring at various residential locations throughout the City in 2021 and again, specifically for this study area in 2024. From the initial 2021 monitoring data, specific locations within the City were categorized as high priority for future investigations for noise mitigation. This report is specific to the residents adjacent to Boudreau Road between Campbell Road and Hebert Road. Site work was conducted for aci in October 2021 & June 2024 by P. Froment, B.Sc., B.Ed., P.L.(Eng.).

2.0 Location Description

The residential receptor locations that will be investigated in this report are for residents who back onto Boudreau Road between Campbell Road and Hebert Road, as shown in [Figure 1](#). Dwellings within this area are composed entirely of single-family homes with their own private outdoor amenity spaces. The rear property line for residents on average, ranges from 10 m to 15 m to the edge of curb for Boudreau Road.

Boudreau Road is a four-lane road that is separated by a centre median throughout. Apart from contributions from various collector roads there are no other major noise sources within the study area.

Topographically, residents in Akinsdale are at the same elevation as Boudreau Road while residents in Pineview are elevated. Therefore, through their fences, residents in Akinsdale have direct line-of-sight to traffic while residents in Pineview have a more obstructed view. The fences in both residential neighbourhoods were similar in that each had areas where the fences were relatively new and well-built while other locations had fences with large gaps between boards and thus did not provide a significant amount of acoustic mitigation.

Lastly, the vegetation between the roads and the residents consists primarily of thin vegetation. Given the relative distance between the roads and the residents, the vegetative sound absorption is considered minimal.

3.0 Measurement Methods

As part of the Project, a 24-hour environmental noise monitoring was conducted at four (4) residential receptor locations within the study area. The initial 2021 noise monitoring locations (M1 & M2), as indicated in [Figure 1](#), were selected to best calibrate the existing noise climate for residents. The 2024 noise monitoring locations (M3 & M4) were selected to validate the preliminary results of the noise model. A detailed description of each location is provided below.

The noise monitoring was conducted collecting broadband A-weighted and C-weighted as well as 1/3 octave band sound levels. In addition, the noise monitoring was accompanied by a digital audio recording for more detailed post process analysis. A local weather monitoring station was used throughout the entire noise monitoring period to obtain the wind speed, wind direction, temperature, and relative humidity.

Refer to [Appendix I](#) for a detailed description of the measurement equipment used in addition to calibration records, [Appendix II](#) for a description of the acoustical terminology, and [Appendix III](#) for a list of common noise sources. All noise measurement instrumentation was calibrated at the start of the measurements and then checked afterwards to ensure that there had been negligible calibration drift over the duration of the measurements.

Noise Monitor 1 (60 Aspen Crescent - Boudreau Road)

Noise Monitor 1 was located approximately 15 m south of Boudreau Road and 130 m west of Akins Drive as shown in [Figure 1](#) and [Figure 2](#). This placed the noise monitor approximately 2 m south of the back-property line at 60 Aspen Crescent. The noise monitor had partial line-of-sight to Boudreau Road through small gaps in the wooden fence along the rear property line. The noise monitoring data for this location was taken from 22:00 on Wednesday October 6 to 22:00 on Thursday October 7, 2021 (entire 24-hour period).

Noise Monitor 2 (44 Andrew Crescent - Boudreau Road)

Noise Monitor 2 was located approximately 15 m south of Boudreau Road and 80 m west of Campbell Road as shown in [Figure 1](#) and [Figure 3](#). This placed the noise monitor approximately 5 m south of the back-property line at 44 Andrew Crescent. The noise monitor had partial line-of-sight to Boudreau Road through small gaps in the wooden fence along the rear property line. The noise monitoring data for this

location was taken from 22:00 on Monday October 4 to 22:00 on Tuesday October 5, 2021 (entire 24-hour period).

Noise Monitor 3 (15 Patterson Crescent – Boudreau Road)

Noise Monitor 3 was located approximately 15 m north of Giroux Road and 48 m east of Page Drive as shown in [Figure 1](#) and [Figure 4](#). This placed the noise monitor approximately 3 m north of the back-property line at 15 Patterson Crescent. The noise monitor had partial line-of-sight to Boudreau Road through small gaps in the wooden fence along the rear property line. The noise monitoring data for this location was taken from 22:00 on Wednesday June 19 to 22:00 on Thursday June 20, 2024 (entire 24-hour period).

Noise Monitor 4 (52 Andrew Crescent – Boudreau Road)

Noise Monitor 4 was located approximately 15 m south of Giroux Road and 160 m west of Campbell Road as shown in [Figure 1](#) and [Figure 5](#). This placed the noise monitor approximately 3 m south of the back-property line at 15 Patterson Crescent. The noise monitor had partial line-of-sight to Boudreau Road through small gaps in the wooden fence along the rear property line. The noise monitoring data for this location was taken from 22:00 on Wednesday June 19 to 22:00 on Thursday June 20, 2024 (entire 24-hour period).

4.0 Computer Noise Modeling

4.1. Computer Noise Modeling Software

The computer noise modeling was conducted using the CADNA/A (Version 2024 MR1, build: 205.5427) software package. CADNA/A allows for the modeling of various noise sources such as road, rail, and various stationary sources. In addition, topographical features such as land contours, vegetation, and bodies of water can be included. Finally, meteorological conditions such as temperature, relative humidity, wind-speed and wind-direction can be included in the calculations.

The calculation method used for noise propagation follows the ISO standard 9613-2. All receiver locations were assumed as being downwind from the source(s). In particular, as stated in Section 5 of the ISO document:

“Downwind propagation conditions for the method specified in this part of ISO 9613 are as specified in 5.4.3.3 of ISO 1996-2:1987, namely

- wind direction within an angle of $\pm 45^\circ$ of the direction connecting the centre of the dominant sound source and the centre of the specified receiver region, with the wind blowing from source to receiver, and
- wind speed between approximately 1 m/s and 5 m/s, measured at a height of 3 m to 11 m above the ground.

The equations for calculating the average downwind sound pressure level LAT(DW) in this part of ISO 9613, including the equations for attenuation given in clause 7, are the average for meteorological conditions within these limits. The term average here means the average over a short time interval, as defined in 3.1.

These equations also hold, equivalently, for average propagation under a well-developed moderate ground-based temperature inversion, such as commonly occurs on clear, calm nights”.

Due to the small amount of vegetation, and thus relative ineffectiveness to mitigate the noise climate, no vegetation was included in the model. Similarly, no snow cover was included since there can be variation in absorption/reflection caused by different snow conditions. As a result, all sound level propagation calculations are considered representative of summertime conditions for all surrounding residents.

4.2. Noise Modeling Scenarios

As part of the study, three (3) scenarios were modeled including:

- 1) **Baseline Case:** This included existing buildings, elevation contours and noise sources (including current traffic volumes and road alignments). The results from the baseline noise monitoring were used a calibration tool for the noise model.
- 2) **Future Case:** This included components of the Current Case Scenario with the projected future traffic volumes required to exceed the City of St. Albert’s permissible sound levels (discussed in later sections).
- 3) **Future Case with Noise Mitigation:** This included components of the Future Case Scenario with the addition of a 1.83 m noise barrier.

4.3. Noise Modeling Parameters

Due to the relatively short distances from the roads to the nearest residential structures and the minimal amount of vegetation, vegetative sound absorption was not included in the model. In addition, snow cover was not included since there can be variation in absorption/reflection caused by different snow conditions.

As a result, all projected future sound level propagation calculations are considered representative of summertime conditions for all residents.

Buildings were included in the model, however, receptors were only placed in the first rows of perimeter development. In general, these houses have the highest potential for providing shielding for the remainder of the houses further in. The exact dimensions and locations of existing structures were not known, so approximate dimensions were used.

Digital topographical information (in the form of elevation contours) representing existing conditions were included in the noise model.

Existing traffic volumes on Giroux were provided from the City of St. Albert.

The computer noise modeling results were calculated in two ways. First, sound levels were calculated at specific receptor locations (i.e. typical residential outdoor amenity spaces). This was done at a height of 1.5 m (from the ground) and at a 5 m offset from the back/side property line of for all locations. The projected noise levels at the receptor locations provide a more representative indication of the typical noise levels experienced by residents in their private backyard space (i.e. not directly adjacent to the rear property line). In addition, the use of specific receptor locations allows for a better comparative evaluation of noise levels (e.g. anticipated performance of any noise mitigation measures).

Secondly, color noise contours were calculated using a 2 m x 2 m grid over the entire study area at a height of 1.5 m. The color noise contours are used to determine if and where noise mitigation is required as they illustrate the projected noise levels within the entire residential private back yard spaces. They are then used once mitigation is in place in order to ensure that all areas within the residential private back yard spaces are below the applicable criteria.

Refer to [Appendix IV](#) for a list of all noise modeling parameters including vehicle traffic volumes.

4.4. Modeling Confidence

The algorithms used for the noise modeling follow the ISO 9613 standard. The published accuracy for this standard is ± 3 dBA between 100 m – 1,000 m. Accuracy levels beyond 1,000 m are not published. Experience based on similar noise models conducted over large distances shows that, as expected, as the

distance increases, the associated accuracy in prediction decreases. Experience has shown that environmental factors such as wind, temperature inversions, topography and ground cover all have increasing effects over distances larger than approximately 1,500 m.

5.0 Permissible Sound Levels

Environmental noise levels from roads are commonly described in terms of equivalent sound levels or L_{eq} . This is the level of a steady sound having the same acoustic energy, over a given time period, as the fluctuating sound. In addition, this energy averaged level is A-weighted to account for the reduced sensitivity of average human hearing to low frequency sounds. These L_{eq} in dBA, which are the most common environmental noise measure, are often given for day-time (07:00 to 22:00) L_{eqDay} and night-time (22:00 to 07:00) $L_{eqNight}$ while other criteria use the entire 24-hour period as L_{eq24} .

The criteria used to evaluate the road noise in the study area include the City of St. Albert Municipal Engineering Standards, Section 3.3.1.9 on Noise Attenuation. The following is taken directly from the document:

*“A Noise Impact Assessment, signed and sealed by a professional engineer, must be provided in cases where a major arterial roadway and/or railway runs through or adjacent to a proposed residential development. The assessment must list the current noise levels, estimate future noise levels, and identify and implement noise attenuation measures required to achieve a **maximum noise level of 65 dBA L_{eq} over a 24-hour period**, and in accordance with the City’s Noise Bylaw, Bylaw 31/2006.”*

As such, the permissible sound level (PSL) is **65 dBA L_{eq24}** .

6.0 Results and Discussion

6.1. Environmental Monitoring

The results obtained from the baseline environmental noise monitoring are provided in Table 1 and [Figure 6 – 13](#) (broadband A-weighted L_{eq} sound levels and 1/3 octave band L_{eq} sound levels provided). It should be noted that the data has been adjusted by the removal of non-transportation related or otherwise abnormal noise events (such as loud aircraft flyovers, loud vehicle passages, dogs barking, etc.). Thus, the remaining data more accurately reflects the noise levels associated with the adjacent transportation corridors. A list of all non-typical noise events removed from each monitoring location can be found in [Appendix V](#).

Table 1. L_{eq} 24-hour results

Monitor	Location	Date	L_{eq24} (dBA)	L_{eqDay} (dBA)	$L_{eqNight}$ (dBA)
Monitor 1	60 Aspen Crescent	10/6/2021 – 10/7/2021	57.0	58.4	52.5
Monitor 2	44 Andrew Crescent	10/6/2021 – 10/7/2021	57.8	59.2	53.2
Monitor 3	15 Patterson Crescent	6/19/2024 – 6/20/2024	62.0	53.2	58.7
Monitor 4	52 Andrew Crescent	6/19/2024 – 6/20/2024	58.9	59.9	56.6

The measured L_{eq24} values for all locations were below 65 dBA and, as anticipated, the dominant noise source was traffic from Boudreau Road. As previously mentioned, the noise monitoring for this area was primarily to determine the variance in noise levels between the two neighbourhoods. The resultant 1/3 octave band L_{eq} sound levels for all monitors are very similar. They all show the typical trend of low frequency noise (near 63 – 80 Hz) resulting from engines and exhaust, mid-high frequency noise (near 1,000 Hz) resulting from tire noise. These results confirm that the noise levels being measured by the noise monitors were largely attributed to the nearby roadways.

Weather Conditions

October 6 – 7, 2021

The weather was relatively moderate to calm (between 0 - 10 km/hr), apart from a few short duration of higher wind speeds, for the entire noise monitoring period. The wind varied in direction but was not strong enough to have a significant impact on the noise propagation from the road to the monitor. The temperature ranged from (-)2°C - 13°C and the relative humidity ranged from 29% - 92%. In addition, there was no precipitation.

June 19 –20, 2024

The weather at the start of the monitoring period was primarily between low to moderate (between 5 – 10 km/hr) for the duration of the noise monitoring period. The wind varied in direction but was primarily from the south-southeast. The temperature ranged from 7°C - 22°C and the relative humidity ranged from 23% - 68%. In addition, there was no precipitation.

Weather data obtained by the weather station are presented in [Appendix VI](#).

6.2. Computer Noise Modelling

6.2.1. Baseline Case (2021) Scenario

The projected L_{eq24} results of the Baseline Case noise modeling at the monitoring locations is provided in Table 2. As mentioned previously, the L_{eq24} noise monitoring data was used as a calibration tool for the noise model. The relative difference between the modeling and monitoring results is also provided. As indicated in Table 2, the modeling data matches well with the measured values and tend to be slightly conservative (higher than measured) for most locations.

Table 2. Baseline Case Noise Modeling Results at Noise Monitor Location

Location	Monitor	Model	Relative Difference (dBA)
	$L_{eq}Day$ (dBA)	$L_{eq}Day$ (dBA)	
M1	57.8	59.0	1.2
M2	57.0	57.7	0.7
M3	62.0	61.1	-0.9
M4	58.9	59.3	0.4

The results of the Baseline Case noise modeling at the various residential receptor locations within the study area are presented in Table 3 and illustrated in [Figures 14 & 15](#). The projected noise levels are all below 65 dBA and range from 55.8 to 62.4 dBA. The highest L_{eq24} noise level is for receptor R-01, which was anticipated due to its proximity to both Boudreau Road and Hebert Road. The noise contributions from the nearby roads would need to increase by 2.6 dBA before they exceed the City of St. Albert's PSL of 65 dBA L_{eq24} .

Table 3. Baseline Case Noise Modeling Results

Receptor	Baseline L_{eq24} (dBA)	Receptor	Baseline L_{eq24} (dBA)
R-01	62.4	R-16	59.9
R-02	61.0	R-17	59.7
R-03	59.9	R-18	59.7
R-04	59.4	R-19	59.6
R-05	58.9	R-20	59.5
R-06	59.2	R-21	59.7
R-07	59.4	R-22	60.4
R-08	59.8	R-23	59.7
R-09	56.0	R-24	58.1
R-10	55.8	R-25	58.1
R-11	57.4	R-26	58.2
R-12	58.3	R-27	58.3
R-13	58.0	R-28	58.6
R-14	58.1	R-29	58.2
R-15	58.1		
Min	55.8	Max	62.4

6.2.2. Future Case Scenario

The results of the Future Case noise modeling scenario are provided in Table 4 and illustrated in [Figures 16 & 17](#). As previously mentioned, the maximum existing L_{eq24} noise level was 62.4 dBA at R-01. For the noise levels at this location to exceed the City of St. Albert's PSL of 65 dBA L_{eq24} , the overall highest noise levels will need to increase by 2.6 dBA. For this to occur, the 2022 traffic volumes would need to be increased by a factor of 1.8 (i.e. existing traffic volumes multiplied by 1.8). As such, for this scenario the 2022 AADT values were multiplied by 1.8 (as indicated in [Appendix IV](#)).

Table 4. Future Case Noise Modeling Results

Receptor	Future L_{eq24} (dBA)	Difference Relative to Baseline Case L_{eq24} (dBA)	Receptor	Future L_{eq24} (dBA)	Difference Relative to Baseline Case L_{eq24} (dBA)
R-01	65.0	2.6	R-16	62.3	2.4
R-02	63.6	2.6	R-17	62.2	2.5
R-03	62.5	2.6	R-18	62.2	2.5
R-04	61.9	2.5	R-19	62.1	2.5
R-05	61.5	2.6	R-20	62.1	2.6
R-06	61.7	2.5	R-21	62.2	2.5
R-07	61.9	2.5	R-22	62.9	2.5
R-08	62.3	2.5	R-23	62.2	2.5
R-09	58.6	2.6	R-24	60.7	2.6
R-10	58.4	2.6	R-25	60.7	2.6
R-11	60.0	2.6	R-26	60.8	2.6
R-12	60.9	2.6	R-27	60.8	2.5
R-13	60.6	2.6	R-28	61.2	2.6
R-14	60.7	2.6	R-29	60.7	2.5
R-15	60.7	2.6			
Min	58.4	2.4	Max	65.0	2.6

As indicated in Table 4, there is now an exceedance of 65 dBA L_{eq24} within the study area with noise levels ranging from 58.4 – 65.0 dBA. The relative difference in noise levels when compared to the Baseline Case scenario ranges from 2.4 – 2.6 dBA¹.

¹ It should be noted that the traffic volumes of the collector roads were not increased as the neighbourhoods are currently fully developed. Under future conditions, the contributions from the collectors are not as impactful, therefore, the relative difference to the baseline case will vary for the various receptors depending on their proximity to the collector roads.

6.2.3. Future Case Scenario with 1.83 m Barrier

The results of the Future Case Scenario with mitigation (1.83 m Tall Barrier) noise modeling scenario at the various residential outdoor amenity spaces are presented in Table 5 and illustrated in [Figures 18 & 19](#). The relative difference between the Future Case L_{eq24} with and without mitigation is also included. As indicated in Table 5, all L_{eq24} noise levels are below 65 dBA L_{eq24} and range from 55.3 – 60.8 dBA. The relative difference in noise levels with and without noise mitigation ranges from (-)1.3 to (-)5.8 dBA for all locations.

Table 5. Future Case Noise Modeling Results

Receptor	Mitigation L_{eq24} (dBA)	Difference Relative to Future Case L_{eq24} (dBA)	Receptor	Mitigation L_{eq24} (dBA)	Difference Relative to Future Case L_{eq24} (dBA)
R-01	60.2	-4.8	R-16	57.9	-4.4
R-02	58.3	-5.3	R-17	57.3	-4.9
R-03	57.4	-5.1	R-18	58.2	-4.0
R-04	57.2	-4.7	R-19	57.7	-4.4
R-05	56.4	-5.1	R-20	57.2	-4.9
R-06	55.9	-5.8	R-21	57.6	-4.6
R-07	57.7	-4.2	R-22	58.8	-4.1
R-08	58.5	-3.8	R-23	59.3	-2.9
R-09	57.3	-1.3	R-24	58.4	-2.3
R-10	56.5	-1.9	R-25	58.3	-2.4
R-11	55.3	-4.7	R-26	58.3	-2.5
R-12	57.5	-3.4	R-27	58.3	-2.5
R-13	56.9	-3.7	R-28	58.8	-2.4
R-14	57.6	-3.1	R-29	59.0	-1.7
R-15	58.3	-2.4			
Min	55.3	-5.8	Max	60.2	-1.3

7.0 Conclusion

As part of the study a total of four (4) 24-hour environmental noise monitorings were conducted within the study area. The locations of the monitors were selected to represent the varying noise climate within the study area. The results of the baseline noise monitoring indicated sound levels ranging from 57.0 dBA, to 62.0 dBA L_{eq24} .

The results of the Baseline Case noise modeling resulted in similar values to the monitoring results. The modeled noise levels ranged from 55.8 to 62.4 dBA which is below the City of St. Albert's limit of 65 dBA L_{eq24} .

The Future Case noise model without mitigation with projected traffic volumes that cause an exceedance indicated noise level ranging from 58.4 – 65.0 dBA L_{eq24} for all locations. To achieve this, 2022 traffic volumes were multiplied by 1.8.

The Future Case noise modeling with mitigation (in the form of a 1.83 m noise barrier) resulted in L_{eq24} noise levels ranging from 55.3 – 60.2 dBA which is below the City of St. Albert's limit of 65 dBA L_{eq24} . Relative to the Future case modeling scenario without mitigation, the decrease in noise levels ranged from (-)1.3 dBA to (-)5.8 dBA.

8.0 References

- City of St. Albert Municipal Engineering Standards, Section 3.9 on Noise Attenuation, 2013
- International Organization for Standardization (ISO), *Standard 1996-1, Acoustics – Description, measurement and assessment of environmental noise – Part 1: Basic quantities and assessment procedures*, 2003, Geneva Switzerland.
- International Organization for Standardization (ISO), *Standard 9613-1, Acoustics – Attenuation of sound during propagation outdoors – Part 1: Calculation of absorption of sound by the atmosphere*, 1993, Geneva Switzerland.
- International Organization for Standardization (ISO), *Standard 9613-2, Acoustics – Attenuation of sound during propagation outdoors – Part 2: General method of calculation*, 1996, Geneva Switzerland.



Figure 1. Study Area



Figure 2. Noise Monitor (60 Aspen Crescent)

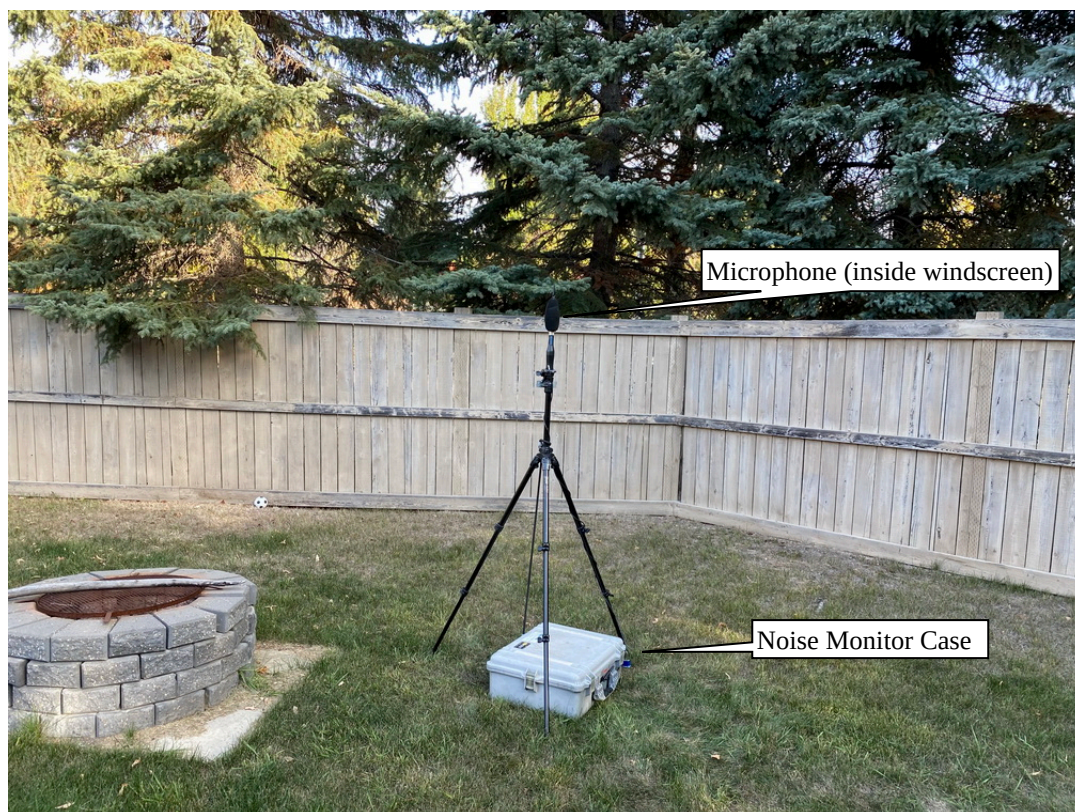


Figure 3. Noise Monitor (44 Andrew Crescent)



Figure 4. Noise Monitor (15 Patterson Crescent)



Figure 5. Noise Monitor (52 Andrew Crescent)

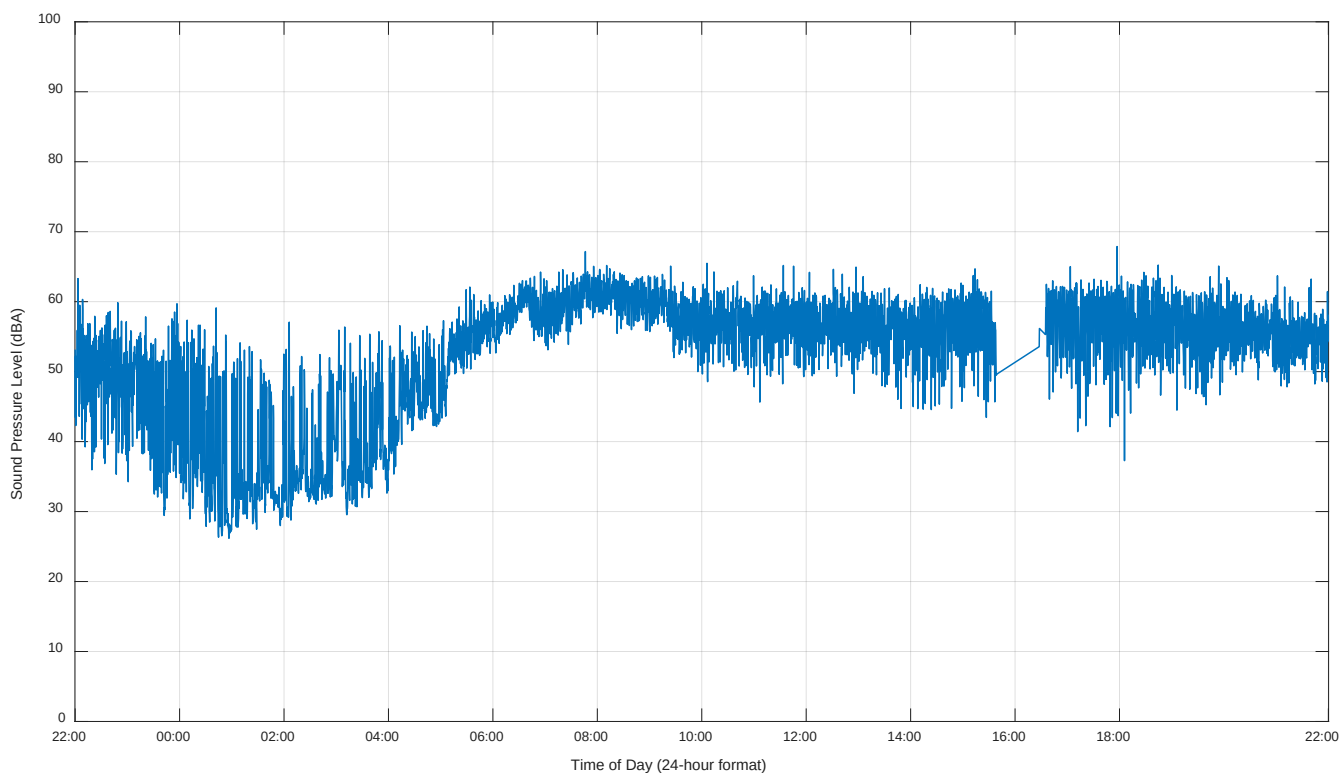


Figure 6. Noise Monitor (60 Aspen Crescent) – 15-Second L_{eq24} Sound Levels

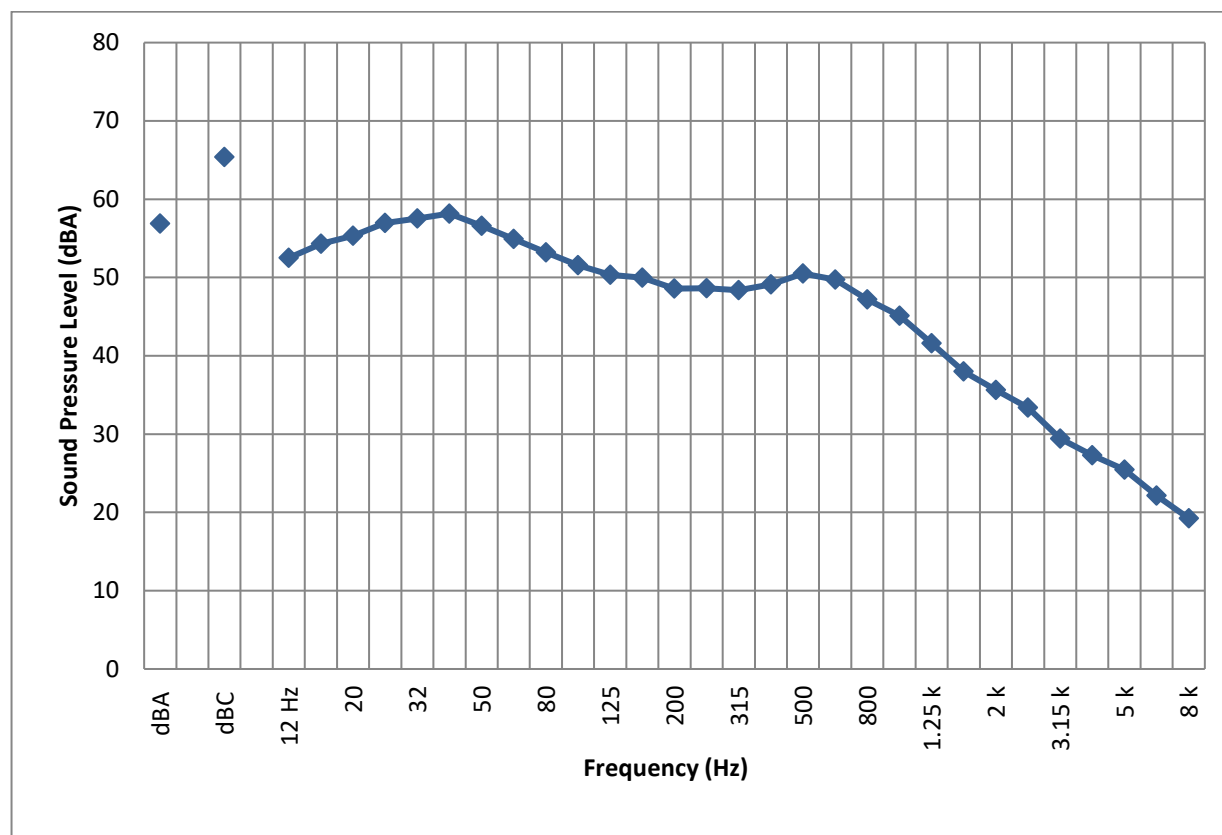


Figure 7. Noise Monitor (60 Aspen Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels

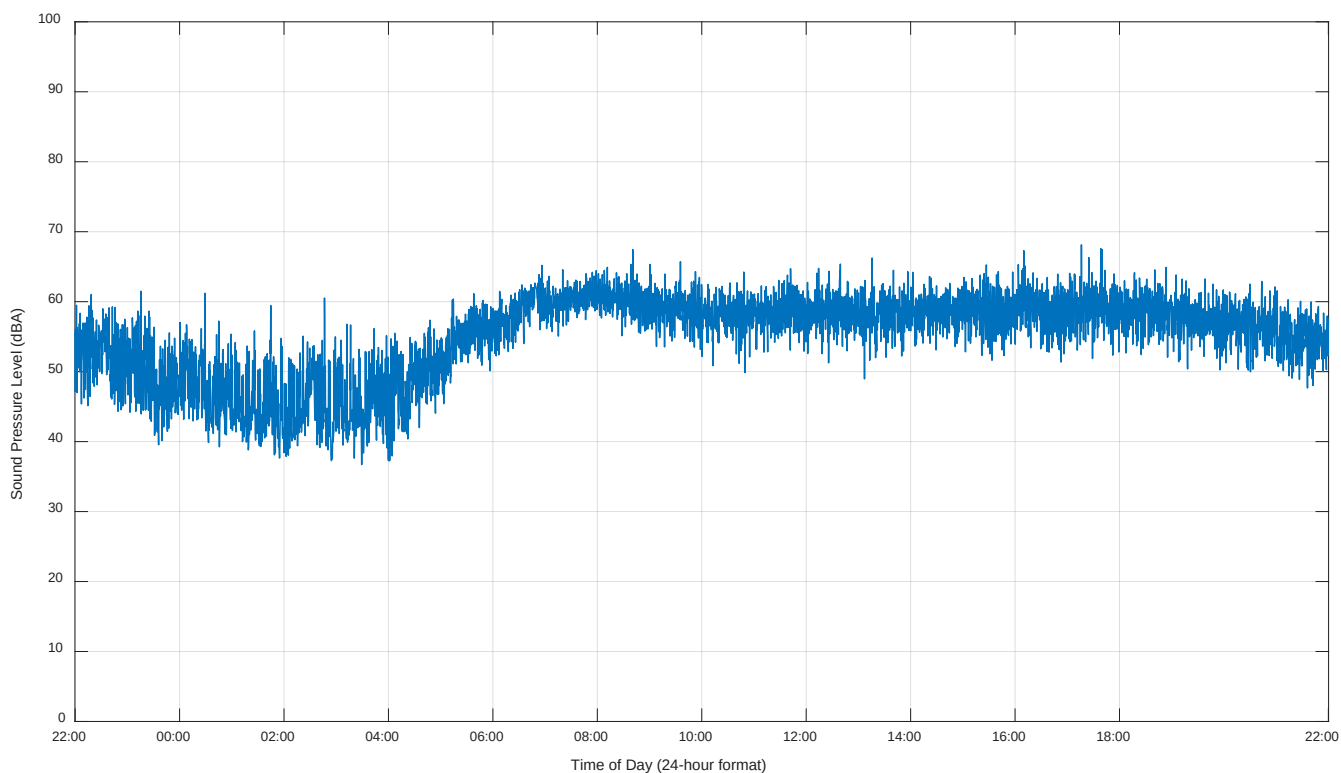


Figure 8. Noise Monitor (44 Andrew Crescent) – 15-Second L_{eq24} Sound Levels

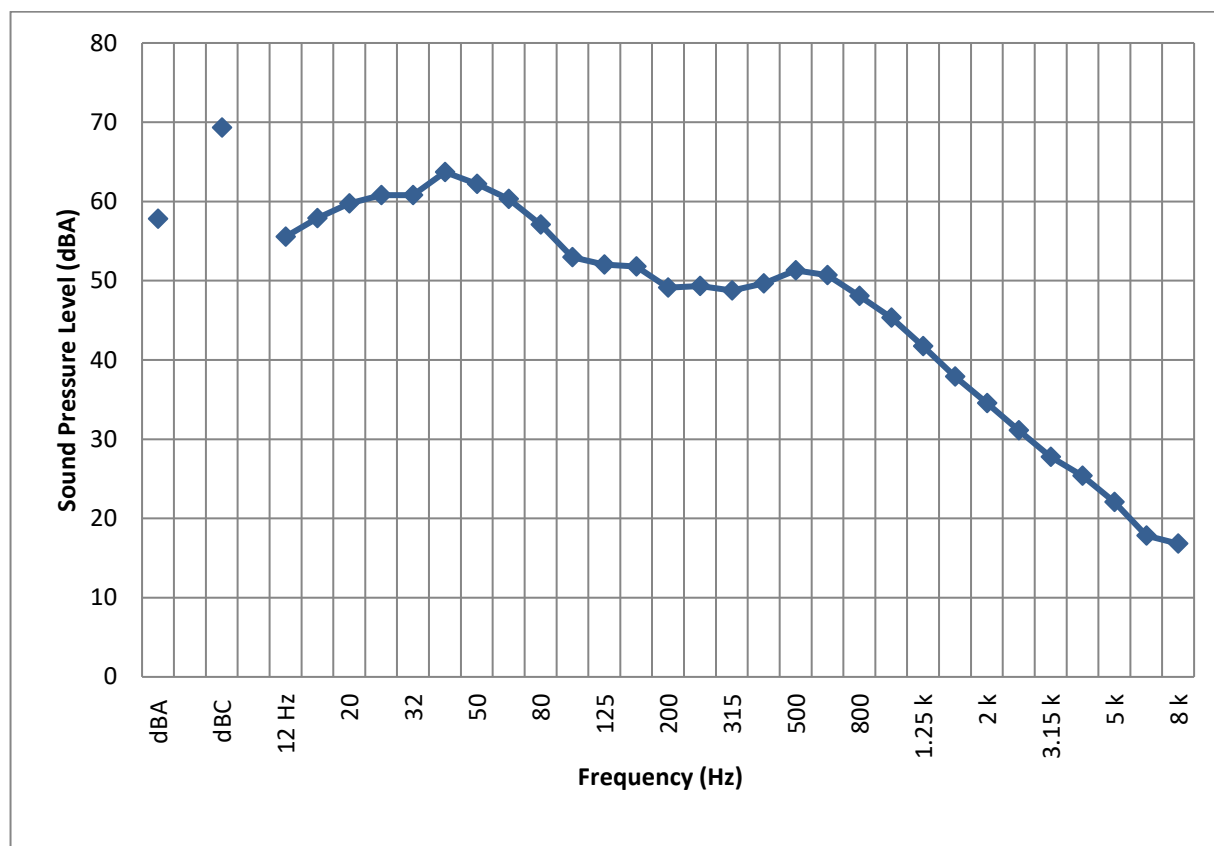


Figure 9. Noise Monitor (44 Andrew Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels

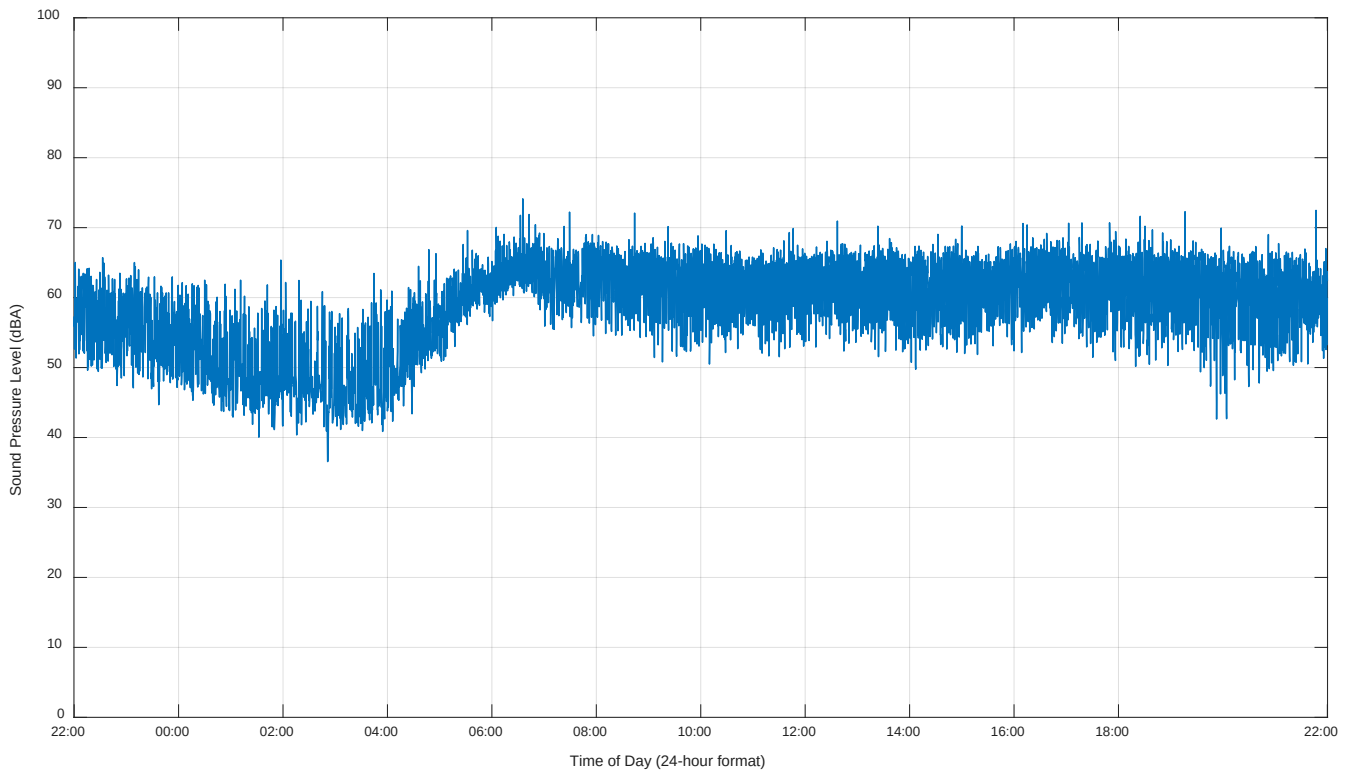


Figure 10. Noise Monitor (15 Patterson Crescent) – 15-Second L_{eq24} Sound Levels

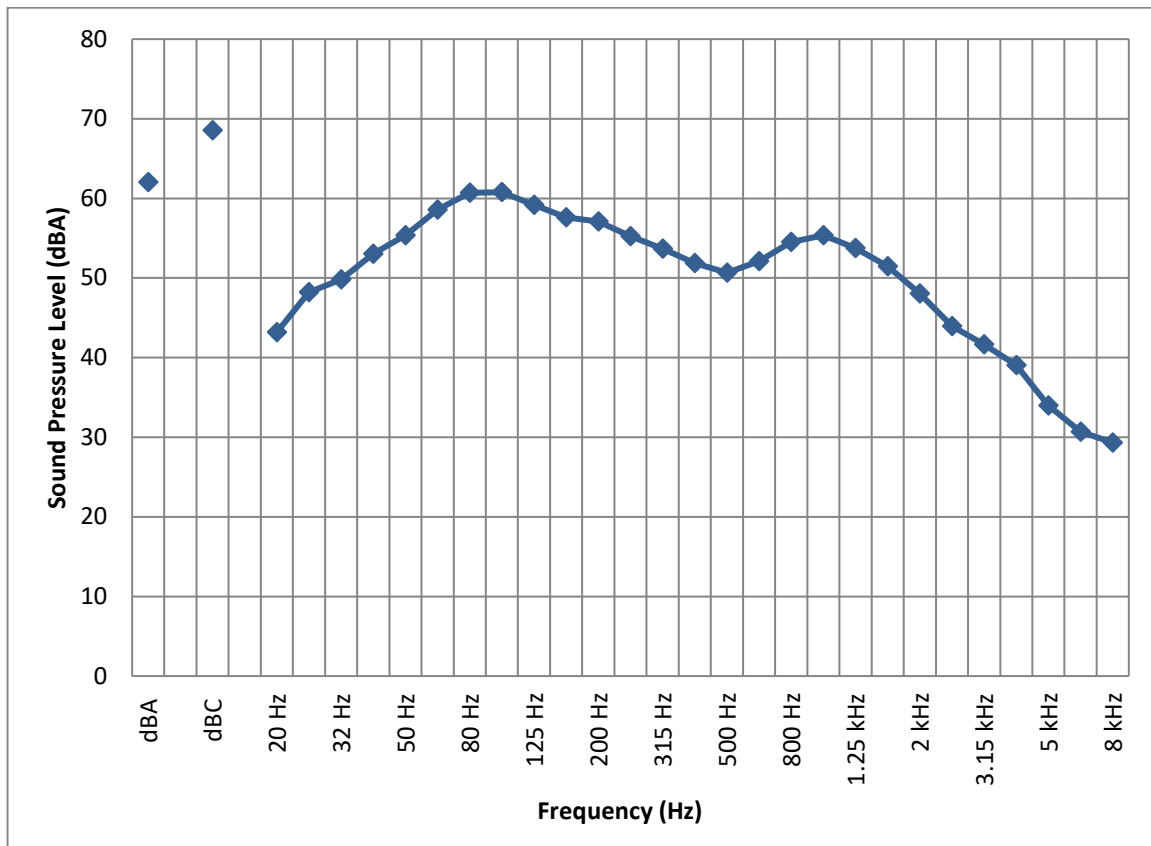


Figure 11. Noise Monitor (15 Patterson Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels

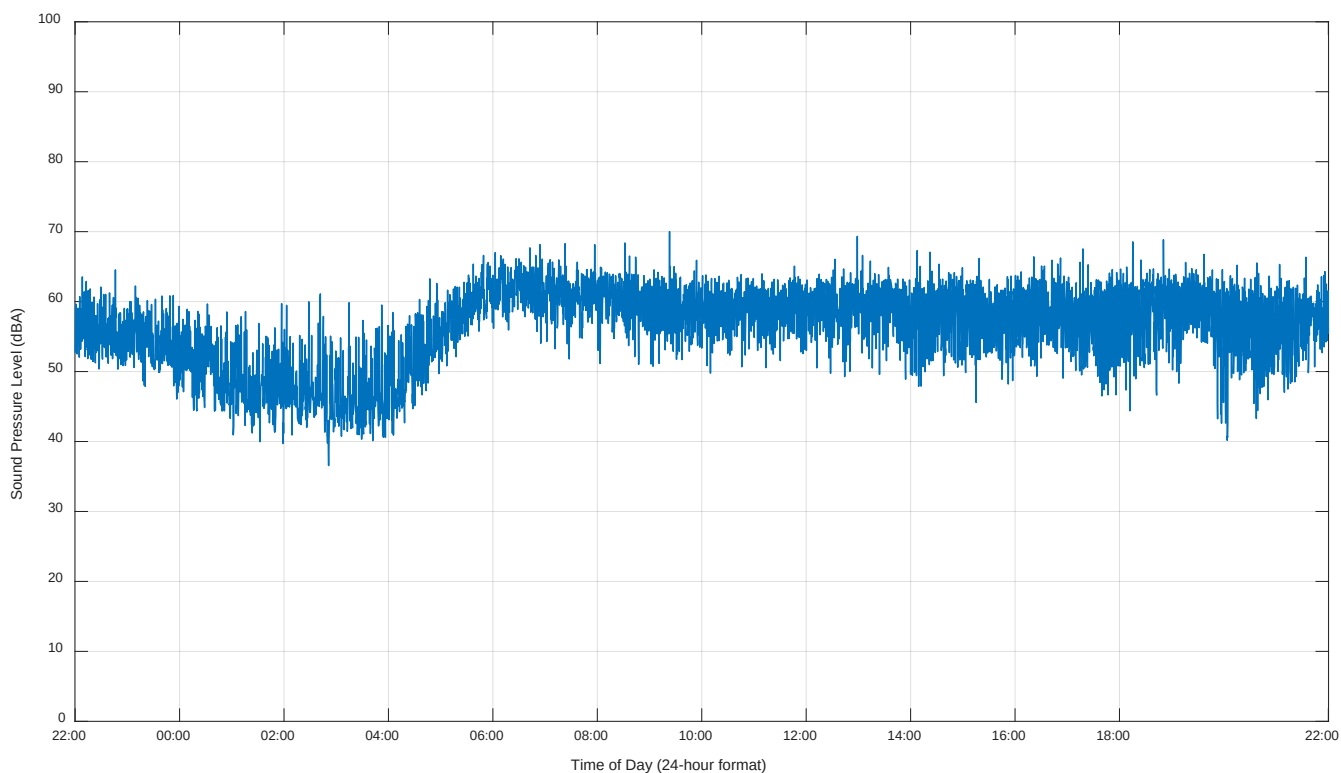


Figure 12. Noise Monitor (52 Andrew Crescent) – 15-Second L_{eq24} Sound Levels

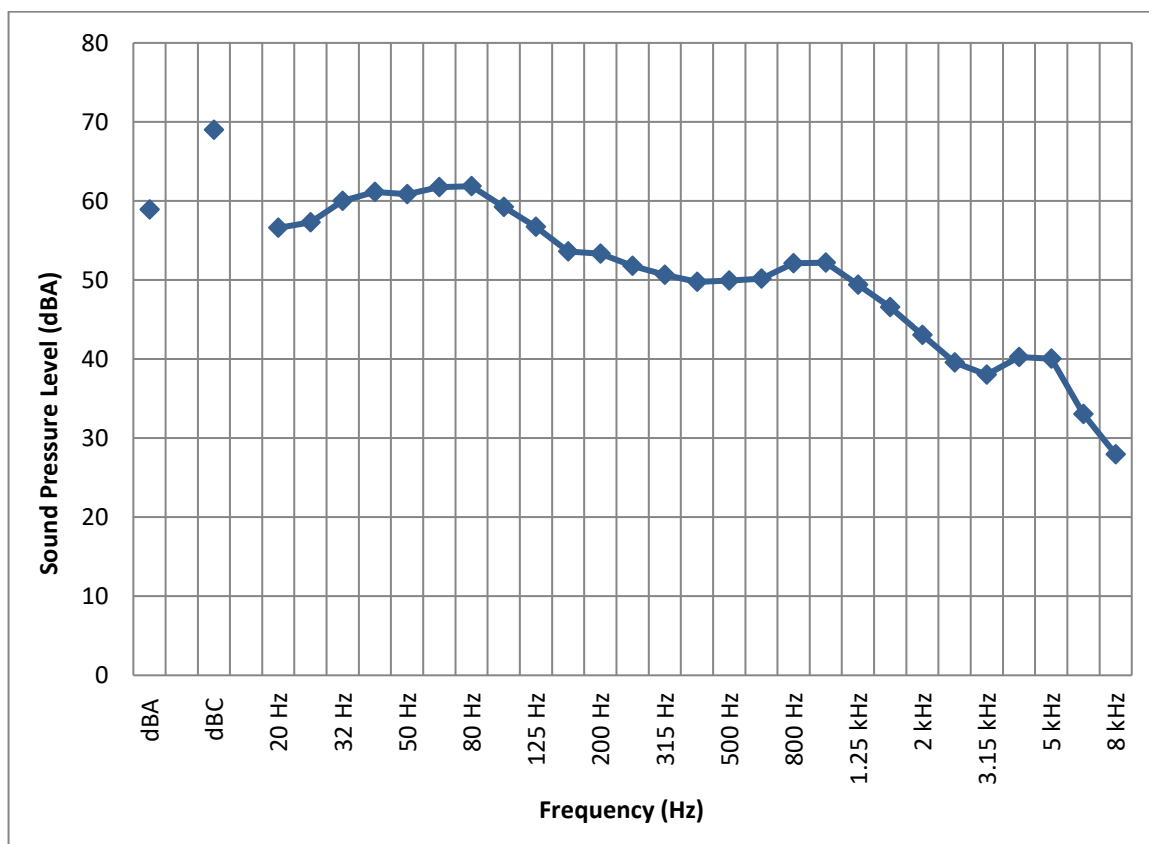


Figure 13. Noise Monitor (52 Andrew Crescent) – 24-Hour 1/3 Octave Band L_{eq} Sound Levels

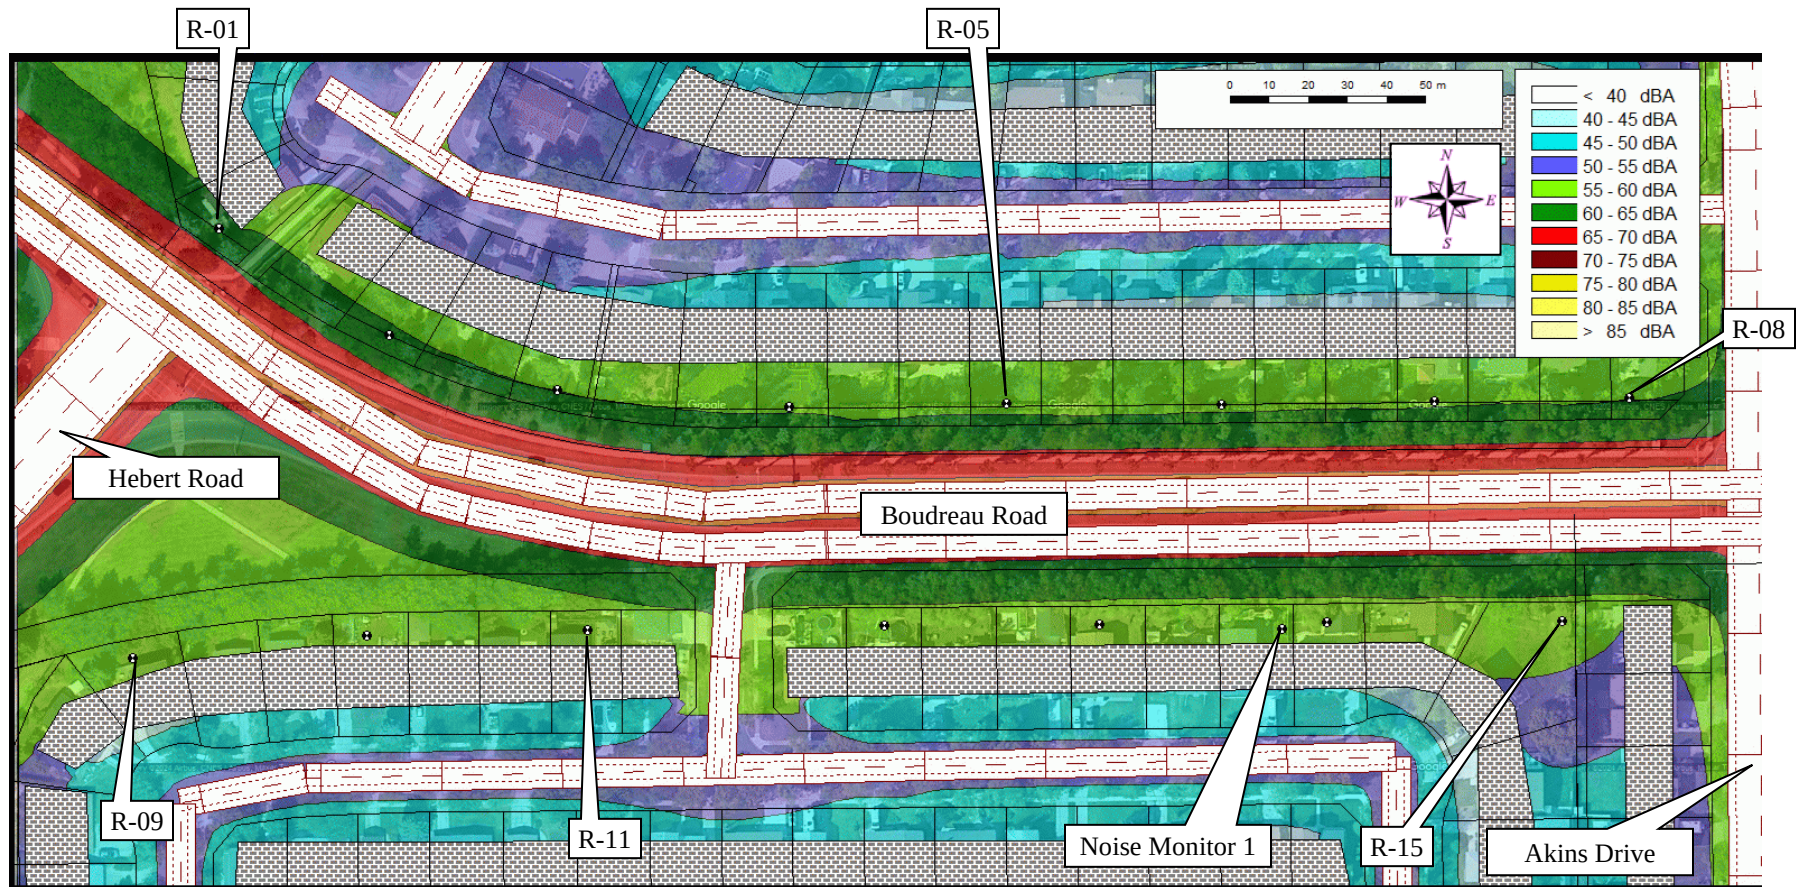


Figure 14. Baseline Case L_{eq24} Noise Levels (West)

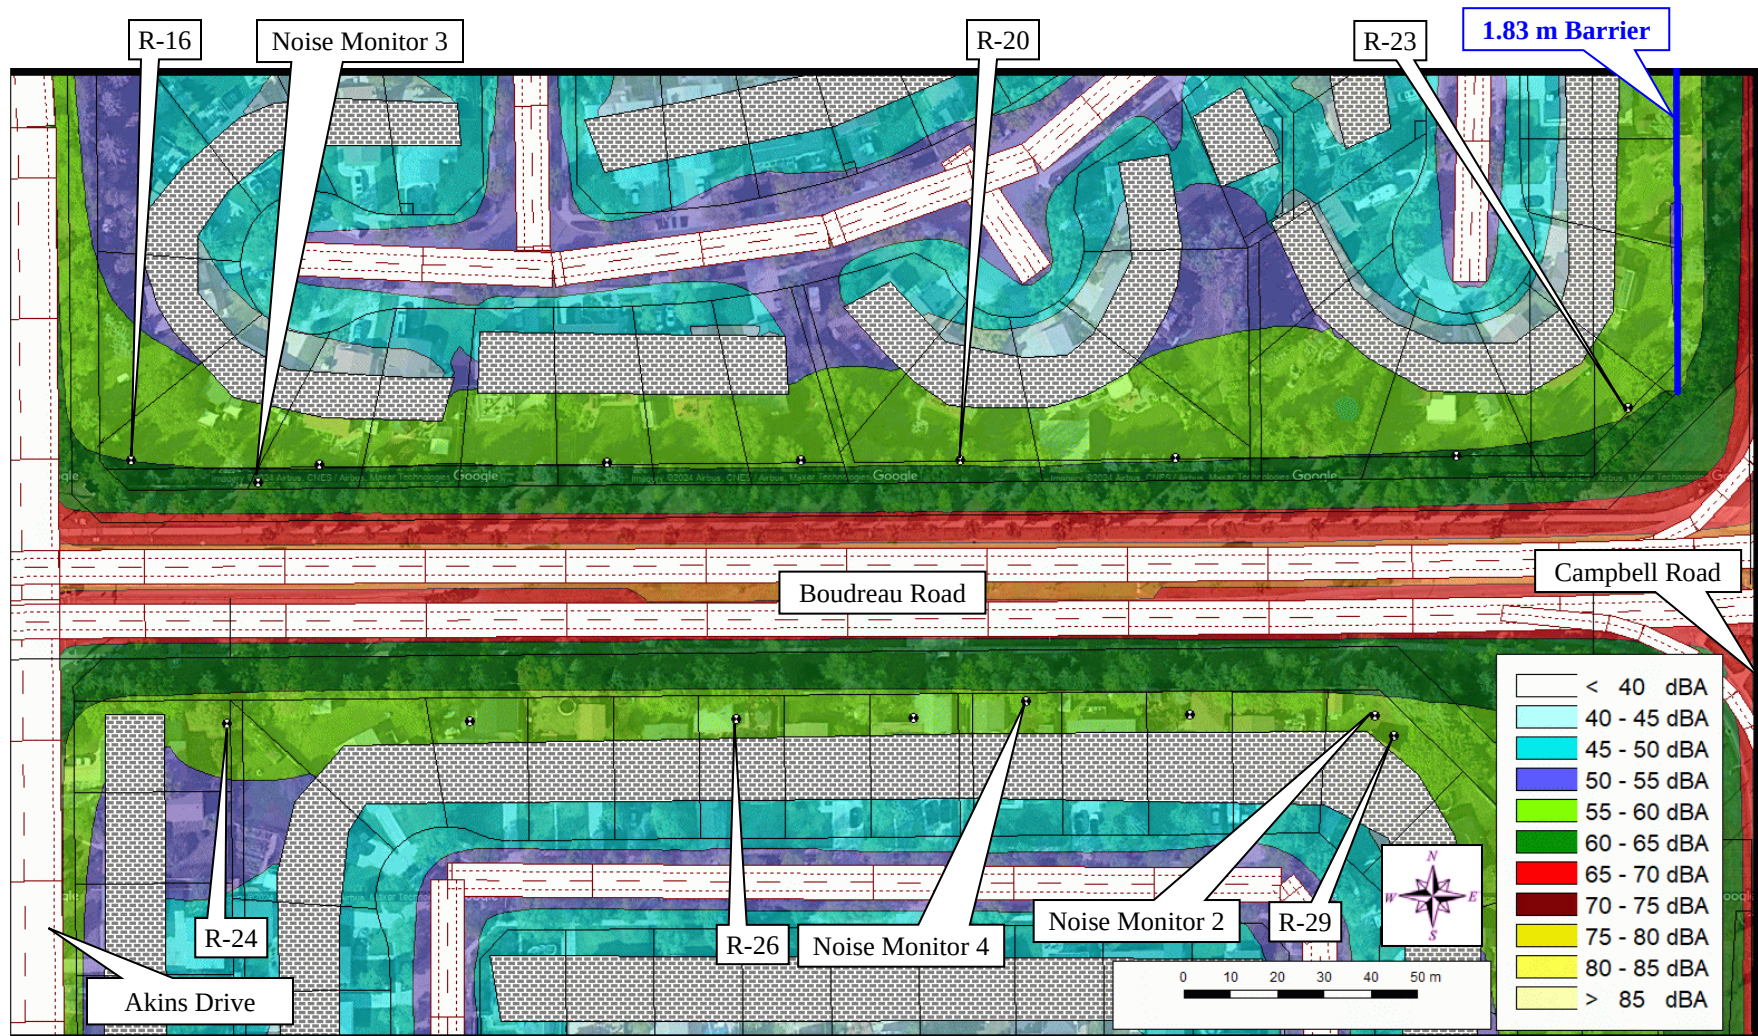


Figure 15. Baseline Case L_{eq24} Noise Levels (East)

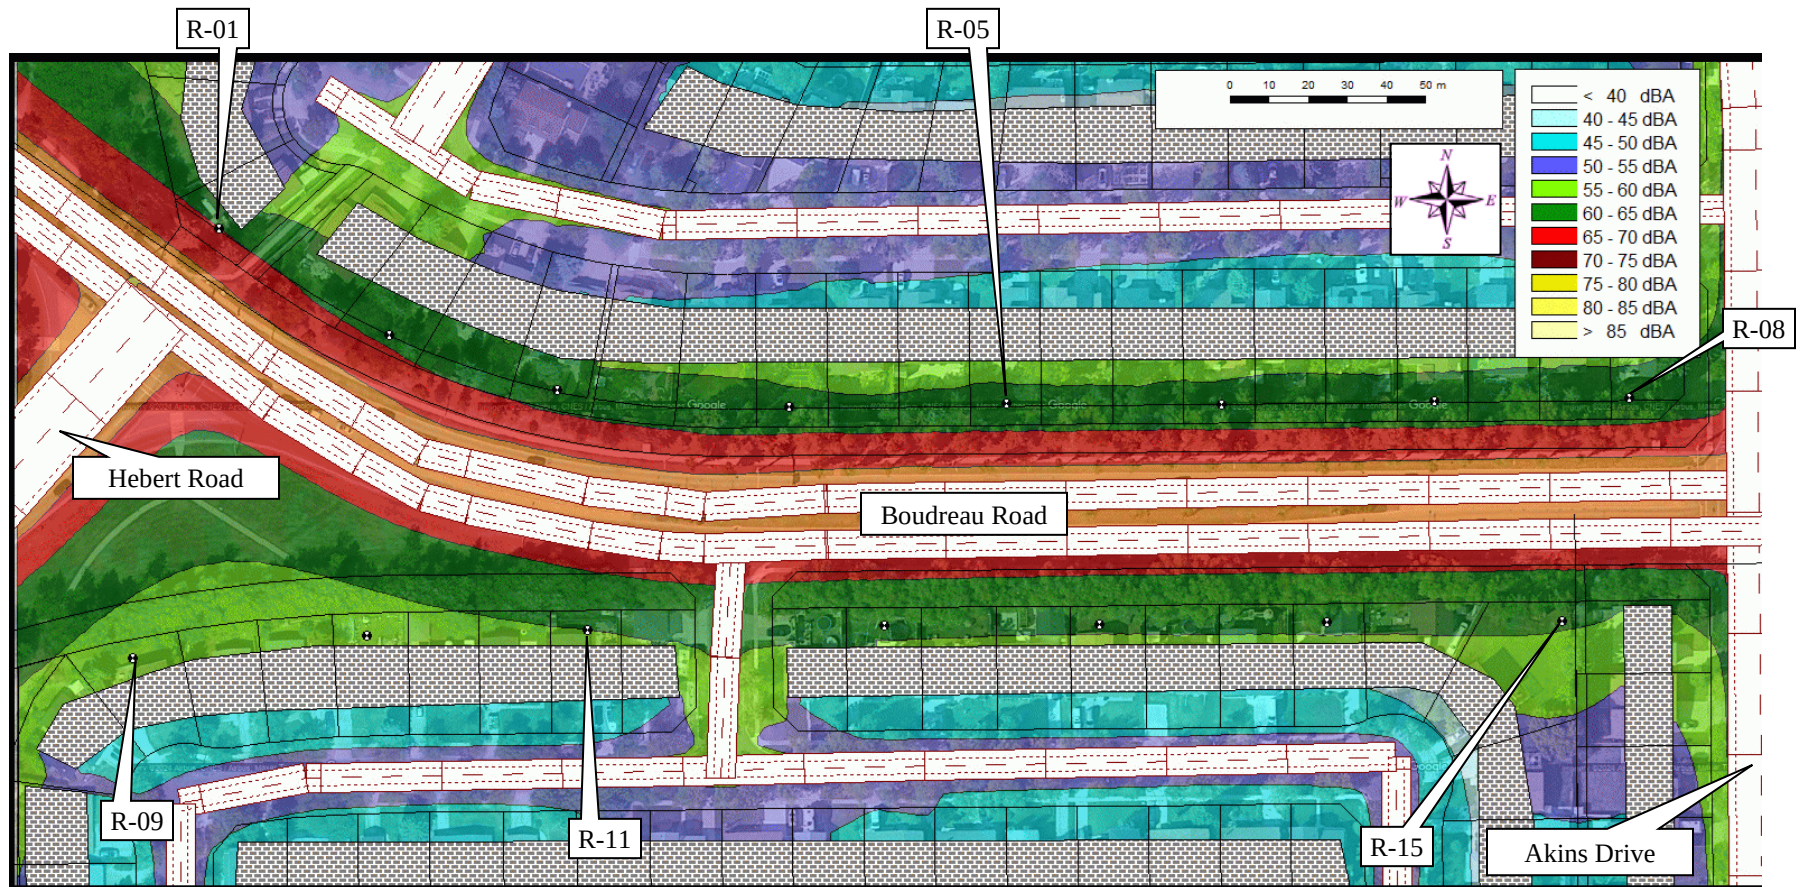


Figure 16. Future Case L_{eq24} Noise Levels (West)

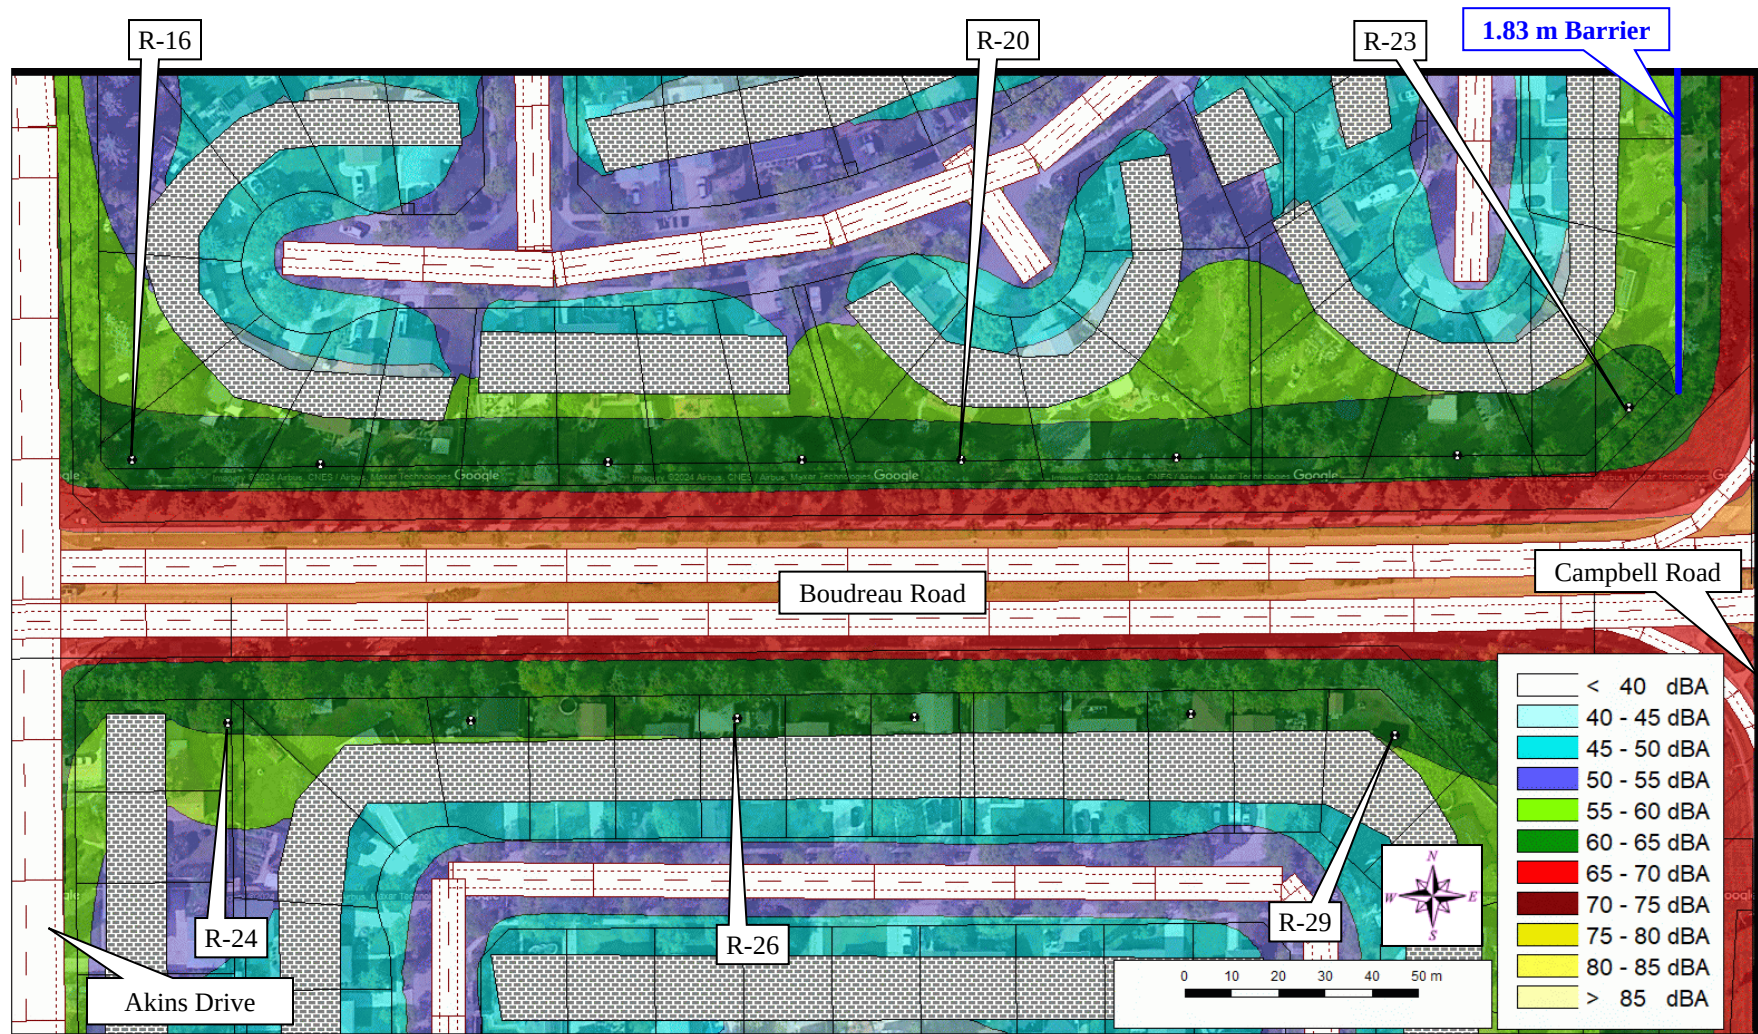


Figure 17. Future Case L_{eq24} Noise Levels (East)

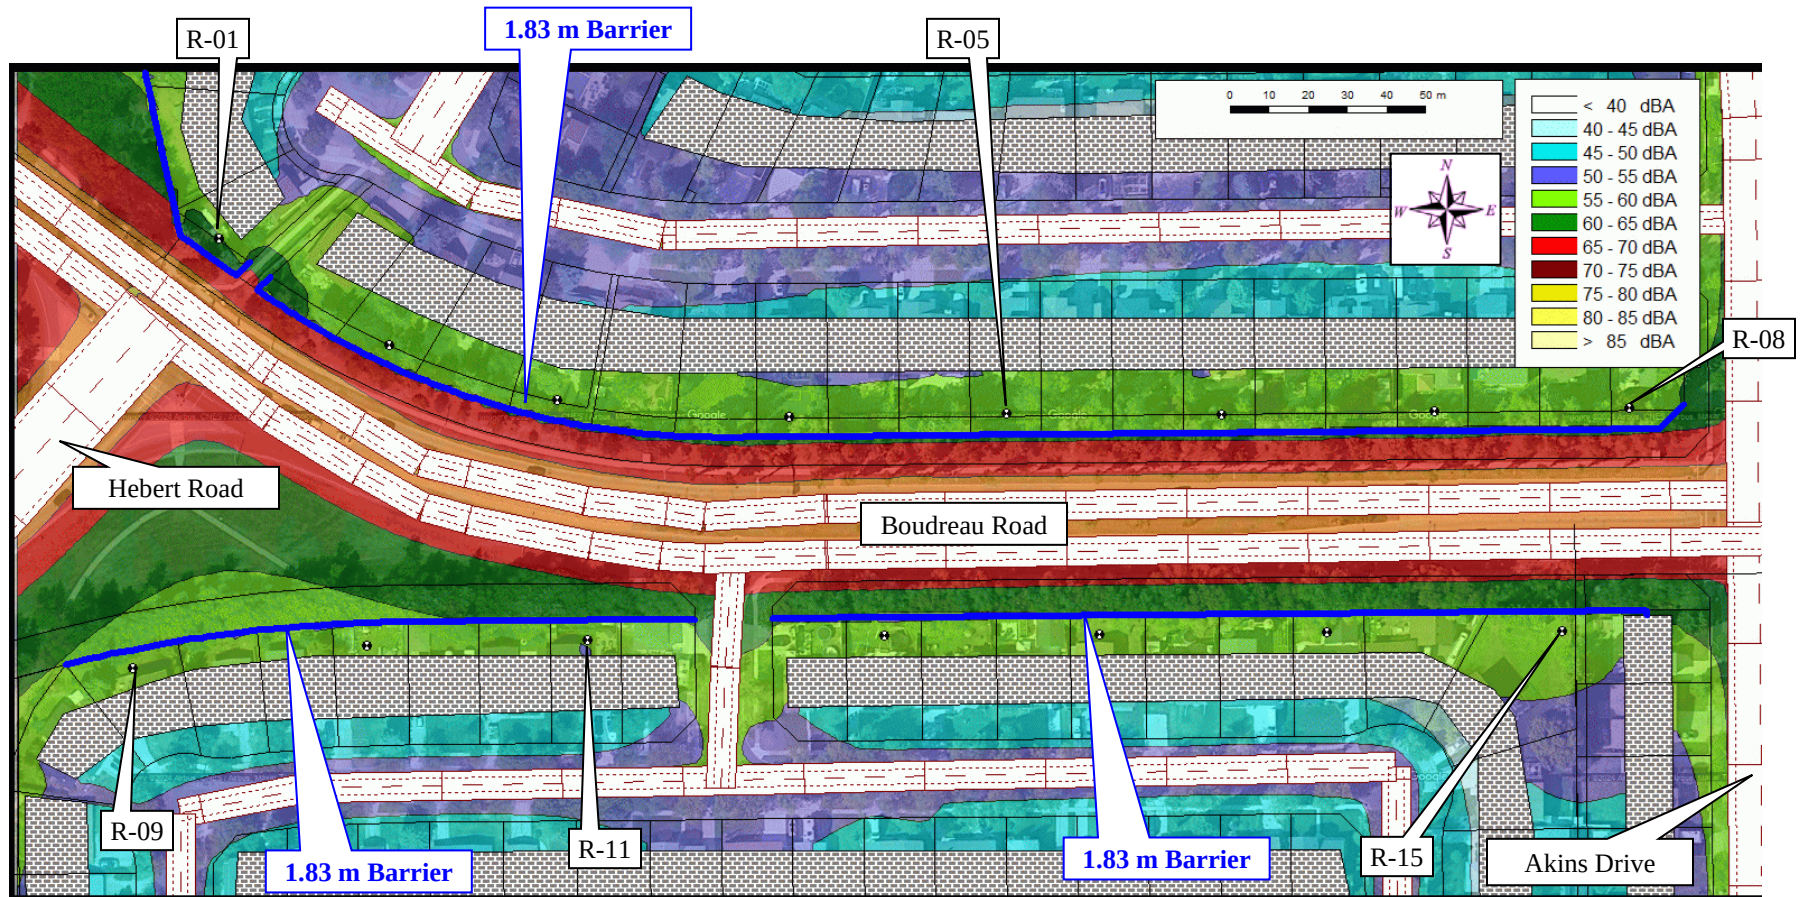


Figure 18. Future Case with Mitigation L_{eq24} Noise Levels (West)

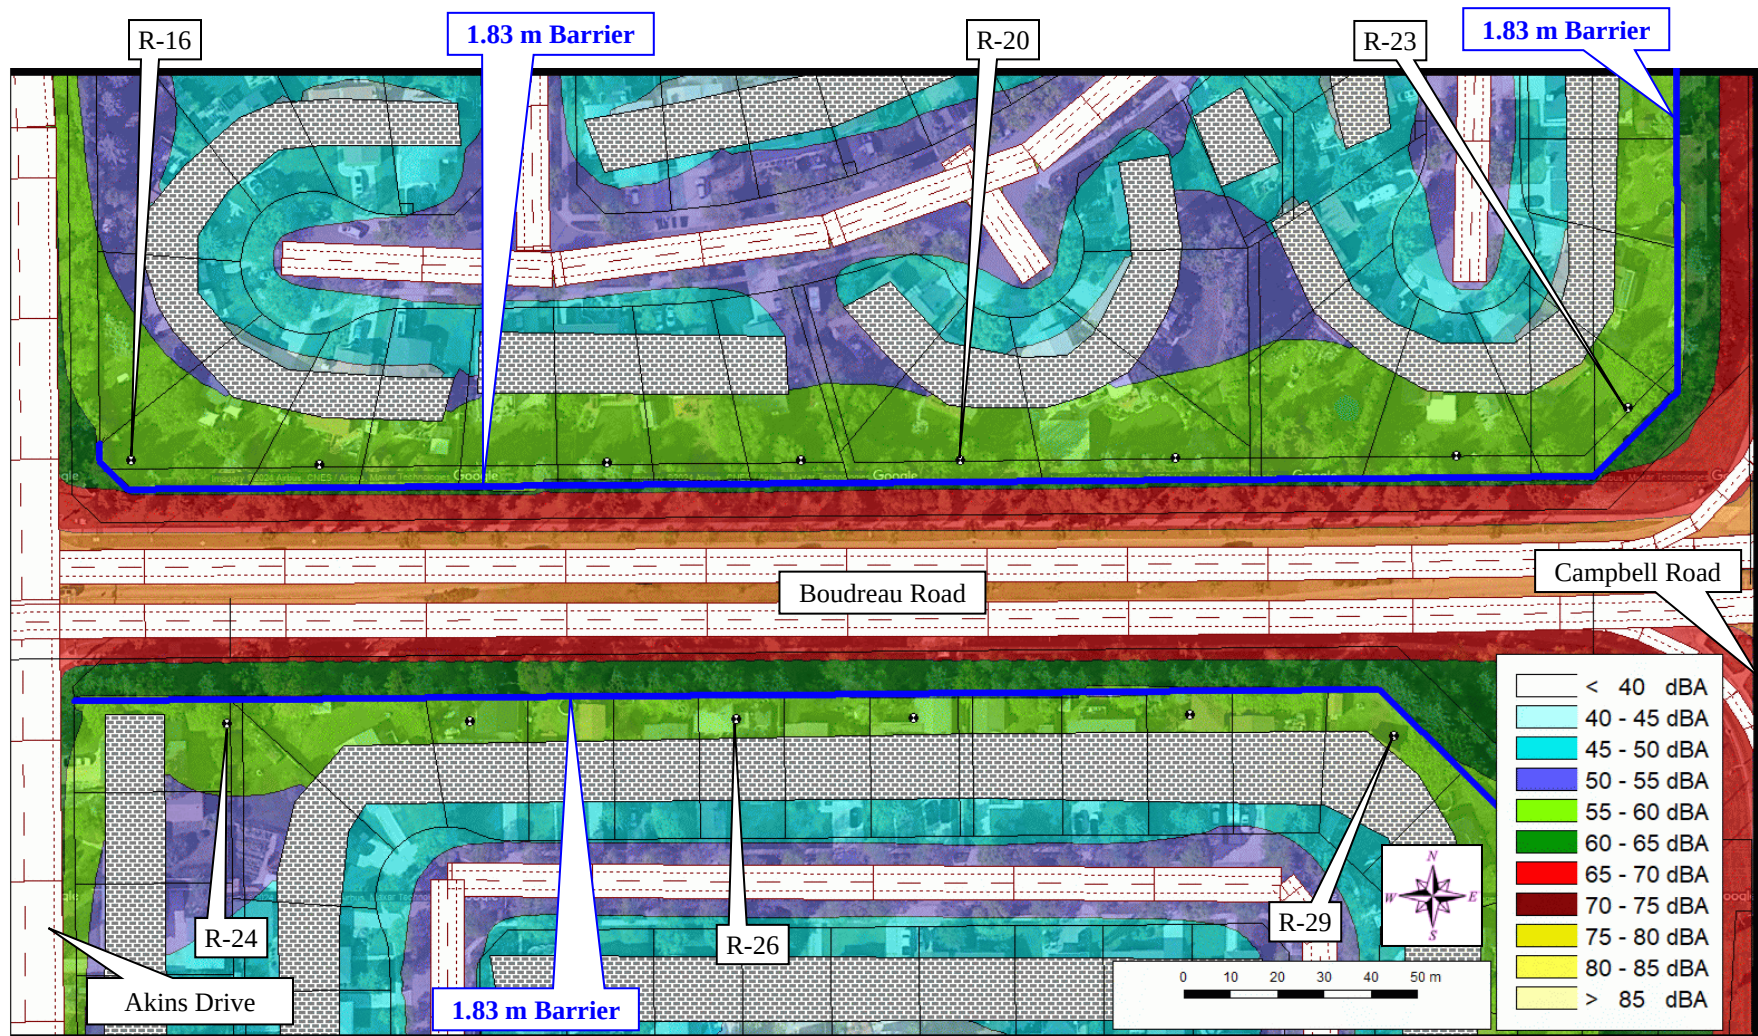


Figure 19. Future Case with Mitigation L_{eq24} Noise Levels (East)

Appendix I MEASUREMENT EQUIPMENT USED

Brüel and Kjær 2250/2270

The environmental noise monitoring equipment used consisted of a Brüel and Kjær Type 2250/2270 Precision Integrating Sound Level Meter enclosed in an environmental case, a tripod, a weather protective microphone hood. The system acquired data in 15-second L_{eq} samples using 1/3 octave band frequency analysis and overall A-weighted and C-weighted sound levels. The sound level meter conforms to Type 1, ANSI S1.4, ANSI S1.43, IEC 61672-1, IEC 60651, IEC 60804 and DIN 45657. The 1/3 octave filters conform to S1.11 – Type 0-C, and IEC 61260 – Class 0. The calibrator conforms to IEC 942 and ANSI S1.40. The sound level meter, pre-amplifier and microphone were certified on April 07, 2021 / April 07, 2021 / April 12, 2023 / April 13, 2023 and the calibrator (type B&K 4231) was certified on March 03, 2021 by a NIST NVLAP Accredited Calibration Laboratory for all requirements of ISO 17025: 1999 and relevant requirements of ISO 9002:1994, ISO 9001:2000 and ANSI/NCSL Z540: 1994 Part 1. Simultaneous digital audio was recorded directly on the sound level meter using a 8 kHz sample rate for more detailed post-processing analysis. Refer to the next section in the Appendix for a detailed description of the various acoustical descriptive terms used.

Weather Monitor

The weather monitoring equipment used for the study consisted of an Orion Weather Station 9510-A-1 with a WXT520 Self-Aspirating Radiation Shield Sensor Unit, a Weather MicroServer 9590 Data-logger, and a Lightning Arrestor. The Data-logger and batteries were located in a grounded, weather protective case. The Sensor Unit was mounted on a sturdy survey tripod (with supporting guy-wires) at approximately 5.0 m above ground. The system was set up to record data in 1-minute samples obtaining the wind-speed, peak wind-speed, and wind-direction in a rolling 2-minute average as well as the 1-minute temperature, relative humidity, barometric pressure, rain rate and total rain accumulation.

Record of Calibration Results

Description	Date	Time	Pre / Post	Calibration Level	Calibrator Model	Serial Number
Monitor #1	06-Oct-21	10:45	Pre	93.9 dBA	B&K 4231	2575493
Monitor #1	08-Oct-21	10:30	Post	93.8 dBA	B&K 4231	2575493
Monitor #2	04-Oct-21	10:15	Pre	93.9 dBA	B&K 4231	2575493
Monitor #2	06-Oct-21	10:25	Post	93.8 dBA	B&K 4231	2575493
Monitor #3	17-Jun-24	15:30	Pre	93.9 dBA	B&K 4231	2642956
Monitor #3	21-Jun-24	13:25	Post	93.8 dBA	B&K 4231	2642956
Monitor #4	17-Jun-24	15:20	Pre	93.9 dBA	B&K 4231	2642956
Monitor #4	21-Jun-24	13:40	Post	93.9 dBA	B&K 4231	2642956

B&K 2270 Unit #2 SLM Calibration Certificate**CERTIFICATE OF CALIBRATION****CALIBRATED**
BY **TRANSCAT**Customer: ACI ACOUSTICAL CONSULTANTS IN
5031-210 STREET NW
EDMONTON, AB T6M 0A8

PO Number: BILAWCHUK

**Certificate/SO Number: 17-Q1X3X-100-1 Revision 0**
Manufacturer: Bruel & Kjaer
Model Number: 2270
Description: Sound Level Meter
Serial Number: 3002718/2850742
ID: UNIT 2

Issue Date: Apr 07, 2021
Calibration Date: Apr 07, 2021

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC28548-3

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab's Scope of Accreditation are indicated by the presence of the Accrediting Body's Logo and Certificate Number. Any measurements on an accredited calibration not covered by that Lab's Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer's Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/NCSL Z540.1-1994 (R2002) or NQA-1, as applicable. Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

A binary decision rule, utilizing simple acceptance criteria is used for the determination of compliance, unless otherwise superseded by the client's Decision Rule. When Calibration Tolerance compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines established by ASME B89.7.3.1-2001 (R2019) as follows:

-The acceptance zone is defined as less than or equal to the high calibration tolerance limit, and/or greater than or equal to the low calibration tolerance limit. The rejection zones are defined as greater than the high calibration tolerance limit and/or less than the low calibration tolerance limit.

-Single measurement results in the acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT).

-When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT).

Uncertainties are reported with a coverage factor k=2, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations: Conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturer's (OEM's) warranted specifications or the client's requested specifications. This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Date Received: March 19, 2021
Service Level: R9
Certificate - Page 1 of 7
Customer Number: 9-330269-000
 OPS-F20-014R8 04/01/21 FF014R0 4/2/2021

B&K 2270 Unit #3 SLM Calibration Certificates**CALIBRATED**
BY **TRANSCAT****CERTIFICATE OF CALIBRATION**

Customer: ACI ACOUSTICAL CONSULTANTS IN
5031-210 STREET NW
EDMONTON, AB T6M 0A8

PO Number: BILAWCHUK



ANAB AC-2489.07

Certificate/SO Number: 17-Q1X3X-80-1 Revision 0

Manufacturer: Brüel & Kjær
Model Number: 2270

Description: Sound Level Meter
Serial Number: 3002730/2850741
ID: UNIT 3

As-Found: In Tolerance
As-Left: In Tolerance

Issue Date: Apr 07, 2021
Calibration Date: Apr 07, 2021

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC28548-3

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab's Scope of Accreditation are indicated by the presence of the Accrediting Body's Logo and Certificate Number. Any measurements on an accredited calibration not covered by that Lab's Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer's Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/NCSL 2540.1-1994 (R2002) or NQA-1, as applicable. Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the CIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

A binary decision rule, utilizing simple acceptance, and simple rejection criteria is used for the determination of compliance, unless otherwise superseded by the client's Decision Rule. When Calibration Tolerance compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines established by ASME B89.7.3.1-2001 (R2019) as follows:

- The acceptance zone is defined as: less than or equal to the high calibration tolerance limit, and/or greater than or equal to the low calibration tolerance limit.
- Single measurement results in this acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT).
- When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT).

Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations: Conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturers (OEM's) warranted specifications or the client's requested specifications. This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Date Received: March 19, 2021
Service Level: R9

Certificate - Page 1 of 7

Customer Number: 9-330269-000
OPS-F20-014R8 04/01/21 FP014R0 4/2/2021

B&K 4231 Calibrator Calibration Certificate**Scantek, Inc.**

CALIBRATION LABORATORY

ISO 17025: 2017, ANSI/NCSL Z540:1994 Part 1
ACCREDITED by NVLAP (an ILAC MRA signatory)**NVLAP**[®]
CALIBRATION
NVLAP Lab Code: 200625-0**Calibration Certificate No.46832****Instrument:** Acoustical Calibrator**Model:** 4231**Manufacturer:** Brüel and Kjær**Serial number:** 2642956**Class (IEC 60942):** 1**Barometer type:****Barometer s/n:****Customer:****Tel/Fax:**

ACI Acoustical Consultants Inc.

780-414-6373 / 780-414-6376

Date Calibrated: 8/26/2021 **Cal Due:****Status:****In tolerance:****Out of tolerance:****See comments:****Contains non-accredited tests:** ☐ Yes ☒ No**Received****Sent**

X

X

Tested in accordance with the following procedures and standards:

Calibration of Acoustical Calibrators, Scantek Inc., Rev. 10/1/2010

Instrumentation used for calibration: Nor-1504 Norsonic Test System:

Instrument - Manufacturer	Description	S/N	Cal. Date	Traceability evidence	Cal. Due
				Cal. Lab / Accreditation	
483B-Norsonic	SME Cal Unit	31052	Oct 31, 2020	Scantek, Inc. / NVLAP	Oct 31, 2021
DS-360-SRS	Function Generator	33584	Oct 23, 2019	ACR Env. / A2LA	Oct 23, 2021
34401A-Agilent Technologies	Digital Voltmeter	MY47011118	Feb 4, 2021	ACR Env. / A2LA	Feb 4, 2022
HM30-Thommen	Meteo Station	1040170/39633	Dec 7, 2020	ACR Env. / A2LA	Dec 7, 2021
140-Norsonic	Real Time Analyzer	1406423	Nov 3, 2020	Scantek / NVLAP	Nov 3, 2021
PC Program 1018 Norsonic	Calibration software	v.6.1T	Validated Nov 2014	Scantek, Inc.	-
4134-Brüel&Kjær	Microphone	173368	Oct 26, 2020	Scantek, Inc. / NVLAP	Oct 26, 2021
1203-Norsonic	Preamplifier	14059	March 3, 2021	Scantek, Inc. / NVLAP	March 3, 2022

Instrumentation and test results are traceable to SI (International System of Units) through standards maintained by NIST (USA) and NPL (UK)

Calibrated by:	Lydon Dawkins	Authorized signatory:	William Gallagher
Signature	<i>Lydon Dawkins</i>	Signature	<i>William Gallagher</i>
Date	8/26/2021	Date	8/27/2021

Calibration Certificates or Test Reports shall not be reproduced, except in full, without written approval of the laboratory.

This Calibration Certificate or Test Reports shall not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Document stored as: Y:\Calibration Lab\Cal 2021\BNK4231_2642956_M1.doc

Page 1 of 2

B&K 2270 Unit #2 SLM Calibration Certificate (2024)**Scantek, Inc.**

CALIBRATION LABORATORY

ISO 17025: 2017, ANSI/NCSL Z540:1994 Part 1
ACCREDITED by NVLAP (an ILAC MRA signatory)**NVLAP**[®]
CALIBRATION
NVLAP Lab Code: 200625-0**Calibration Certificate No.49478**

Instrument: **Sound Level Meter**
 Model: **2270**
 Manufacturer: **Brüel and Kjær**
 Serial number: **3002718**
 Tested with: **Microphone 4189 s/n 2850742**
Preamplifier ZC0032 s/n 18754
 Type (class): **1**
 Customer: **ACI Acoustical Consultants Inc.**
 Tel/Fax: **780-414-6373 / 780-414-6376**

Date Calibrated: **4/12/2023** Cal Due:Status:

Received	Sent
X	X

In tolerance:

X	X
---	---

Out of tolerance:

--	--

See comments:

--	--

Contains non-accredited tests: Yes X NoCalibration service: Basic X StandardAddress: **5031 - 210 Street, Edmonton,
Alberta, CANADA T6M 0A8****Tested in accordance with the following procedures and standards:**

Calibration of Sound Level Meters, Scantek Inc., Rev. 6/26/2015

SLM & Dosimeters – Acoustical Tests, Scantek Inc., Rev. 7/6/2011

Instrumentation used for calibration: Nor-1504 Norsonic Test System:

Instrument - Manufacturer	Description	S/N	Cal. Date	Traceability evidence	Cal. Due
				Cal. Lab / Accreditation	
483B-Norsonic	SME Cal Unit	31061	Aug 3, 2022	Scantek, Inc./ NVLAP	Aug 3, 2023
DS-360-SRS	Function Generator	61646	Dec 21, 2022	ACR Env./ A2LA	Dec 21, 2024
34401A-Keysight	Digital Voltmeter	US36126453	Apr 08, 2022	ACR Env./ A2LA	May 08, 2023
PTU300-Vaisala	Environment Monitor	P5011262	Sept 15, 2022	ACR Env./ A2LA	Sept 15, 2023
PC Program 1019 Norsonic	Calibration software	v.6.1T	Validated Nov 2014	Scantek, Inc.	-
1251-Norsonic	Calibrator	30878	Oct 31, 2022	Scantek, Inc./ NVLAP	Oct 31, 2023

Instrumentation and test results are traceable to SI (International System of Units) through standards maintained by NIST (USA) and NPL (UK).

Environmental conditions:

Temperature (°C)	Barometric pressure (kPa)	Relative Humidity (%)
21.7	100.25	40.7

Calibrated by:	Lydon Dawkins	Authorized signatory:	William Gallagher
Signature	<i>Lydon Dawkins</i>	Signature	<i>William Gallagher</i>
Date	4/12/2023	Date	4/14/2023

Calibration Certificates or Test Reports shall not be reproduced, except in full, without written approval of the laboratory.

This Calibration Certificate or Test Reports shall not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Document stored Y:\Calibration Lab\SLM 2023\BNK2270_3002718_M1.doc

Page 1 of 2

B&K 2270 Unit #3 SLM Calibration Certificate (2024)**Scantek, Inc.**

CALIBRATION LABORATORY

ISO 17025: 2017, ANSI/NCCL Z540:1994 Part 1
ACCREDITED by NVLAP (an ILAC MRA signatory)**NVLAP**[®]
CALIBRATION
NVLAP Lab Code: 200625-0**Calibration Certificate No.49482**

Instrument: Sound Level Meter
Model: 2270
Manufacturer: Brüel and Kjær
Serial number: 3002730
Tested with: Microphone 4189 s/n 2850741
 Preamplifier ZC0032 s/n 18750
Type (class): 1
Customer: ACI Acoustical Consultants Inc.
Tel/Fax: 780-414-6373 / 780-414-6376

Date Calibrated: 4/13/2023 **Cal Due:****Status:**

Received	Sent
X	X

In tolerance:

X	X
---	---

Out of tolerance:

--	--

See comments:**Contains non-accredited tests:** Yes ☒ No**Calibration service:** Basic ☒ Standard**Address:** 5031 - 210 Street, Edmonton,
Alberta, CANADA T6M 0A8**Tested in accordance with the following procedures and standards:**

Calibration of Sound Level Meters, Scantek Inc., Rev. 6/26/2015

SLM & Dosimeters – Acoustical Tests, Scantek Inc., Rev. 7/6/2011

Instrumentation used for calibration: Nor-1504 Norsonic Test System:

Instrument - Manufacturer	Description	S/N	Cal. Date	Traceability evidence	Cal. Due
				Cal. Lab / Accreditation	
483B-Norsonic	SME Cal Unit	31061	Aug 3, 2022	Scantek, Inc./ NVLAP	Aug 3, 2023
DS-360-SRS	Function Generator	61646	Dec 21, 2022	ACR Env./ A2LA	Dec 21, 2024
34401A-Keysight	Digital Voltmeter	US36126453	Apr 08, 2022	ACR Env./ A2LA	May 08, 2023
PTU300-Vaisala	Environment Monitor	P5011262	Sept 15, 2022	ACR Env./ A2LA	Sept 15, 2023
PC Program 1019 Norsonic	Calibration software	v.6.1T	Validated Nov 2014	Scantek, Inc.	-
1251-Norsonic	Calibrator	30878	Oct 31, 2022	Scantek, Inc./ NVLAP	Oct 31, 2023

Instrumentation and test results are traceable to SI (International System of Units) through standards maintained by NIST (USA) and NPL (UK).

Environmental conditions:

Temperature (°C)	Barometric pressure (kPa)	Relative Humidity (%)
22.7	100.07	38.4

Calibrated by:	Lydon Dawkins	Authorized signatory:	William Gallagher
Signature	<i>Lydon Dawkins</i>	Signature	<i>William Gallagher</i>
Date	4/13/2023	Date	4/14/2023

Calibration Certificates or Test Reports shall not be reproduced, except in full, without written approval of the laboratory.

This Calibration Certificate or Test Reports shall not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Document stored Y:\Calibration Lab\SLM 2023\BNK2270_3002730_M1.doc

Page 1 of 2

B&K 4231 Calibrator Calibration Certificate

Scantek, Inc.
CALIBRATION LABORATORY

ISO 17025: 2017, ANSI/NCSL Z540:1994 Part 1
ACCREDITED by NVLAP (an ILAC MRA signatory)

NVLAP[®]
CALIBRATION
NVLAP Lab Code: 200625-0

Calibration Certificate No.50402

Instrument: **Acoustical Calibrator**
Model: **4231**
Manufacturer: **Brüel and Kjær**
Serial number: **2642956**
Class (IEC 60942): **1**
Barometer type:
Barometer s/n:

Date Calibrated: **10/16/2023** Cal Due:

Status:	Received	Sent
In tolerance:	X	X
Out of tolerance:		
See comments:		

Contains non-accredited tests: Yes X No



Customer: **ACI Acoustical Consultants Inc.** Address: **5031 - 210 Street, Edmonton,**
Tel/Fax: **780-414-6373 / 780-414-6376** **Alberta, CANADA T6M 0A8**

Tested in accordance with the following procedures and standards:
Calibration of Acoustical Calibrators, Scantek Inc., Rev. 10/1/2010

Instrumentation used for calibration: Nor-1504 Norsonic Test System:

Instrument - Manufacturer	Description	S/N	Cal. Date	Traceability evidence	Cal. Due
				Cal. Lab / Accreditation	
483B-Norsonic	SME Cal Unit	31052	Nov 7, 2022	Scantek, Inc./ NVLAP	Nov 7, 2023
DS-360-SRS	Function Generator	88077	Dec 21, 2022	ACR Env./ A2LA	Dec 21, 2024
34401A-Agilent Technologies	Digital Voltmeter	MY47011118	Apr 17, 2023	ACR Env. / A2LA	Apr 17, 2024
PTU300-Valsala	Environmental Monitor	P5011262	Sept 20, 2023	ACR Env./ A2LA	Sept 20, 2024
140-Norsonic	Real Time Analyzer	1406423	Nov 9, 2022	Scantek / NVLAP	Nov 9, 2023
PC Program 1018 Norsonic	Calibration software	v.6.1T	Validated Nov 2014	Scantek, Inc.	-
4134-Brüel&Kjær	Microphone	173368	Nov 7, 2022	Scantek, Inc. / NVLAP	Nov 7, 2023
1203-Norsonic	Preamplifier	14059	March 7, 2023	Scantek, Inc./ NVLAP	March 7, 2024

Instrumentation and test results are traceable to SI (International System of Units) through standards maintained by NIST (USA) and NPL (UK)

Calibrated by:	Bailey Partoza	Authorized signatory:	William Gallagher
Signature		Signature	
Date	10/16/23	Date	10/16/2023

Calibration Certificates or Test Reports shall not be reproduced, except in full, without written approval of the laboratory.
This Calibration Certificate or Test Reports shall not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.
Document stored as: Y:\Calibration Lab\Cal 2023\BNK4231_2642956_M2.doc

Page 1 of 2

Appendix II THE ASSESSMENT OF ENVIRONMENTAL NOISE (GENERAL)

Sound Pressure Level


Sound pressure is initially measured in Pascal's (Pa). Humans can hear several orders of magnitude in sound pressure levels, so a more convenient scale is used. This scale is known as the decibel (dB) scale, named after Alexander Graham Bell (telephone guy). It is a base 10 logarithmic scale. When we measure pressure we typically measure the RMS sound pressure.

$$SPL = 10 \log_{10} \left[\frac{P_{RMS}^2}{P_{ref}^2} \right] = 20 \log_{10} \left[\frac{P_{RMS}}{P_{ref}} \right]$$

Where: SPL = Sound Pressure Level in dB
 P_{RMS} = Root Mean Square measured pressure (Pa)
 P_{ref} = Reference sound pressure level ($P_{ref} = 2 \times 10^{-5}$ Pa = 20 μ Pa)

This reference sound pressure level is an internationally agreed upon value. It represents the threshold of human hearing for “typical” people based on numerous testing. It is possible to have a threshold which is lower than 20 μ Pa which will result in negative dB levels. As such, zero dB does not mean there is no sound!

In general, a difference of 1 – 2 dB is the threshold for humans to notice that there has been a change in sound level. A difference of 3 dB (factor of 2 in acoustical energy) is perceptible and a change of 5 dB is strongly perceptible. A change of 10 dB is typically considered a factor of 2. This is quite remarkable when considering that 10 dB is 10-times the acoustical energy!

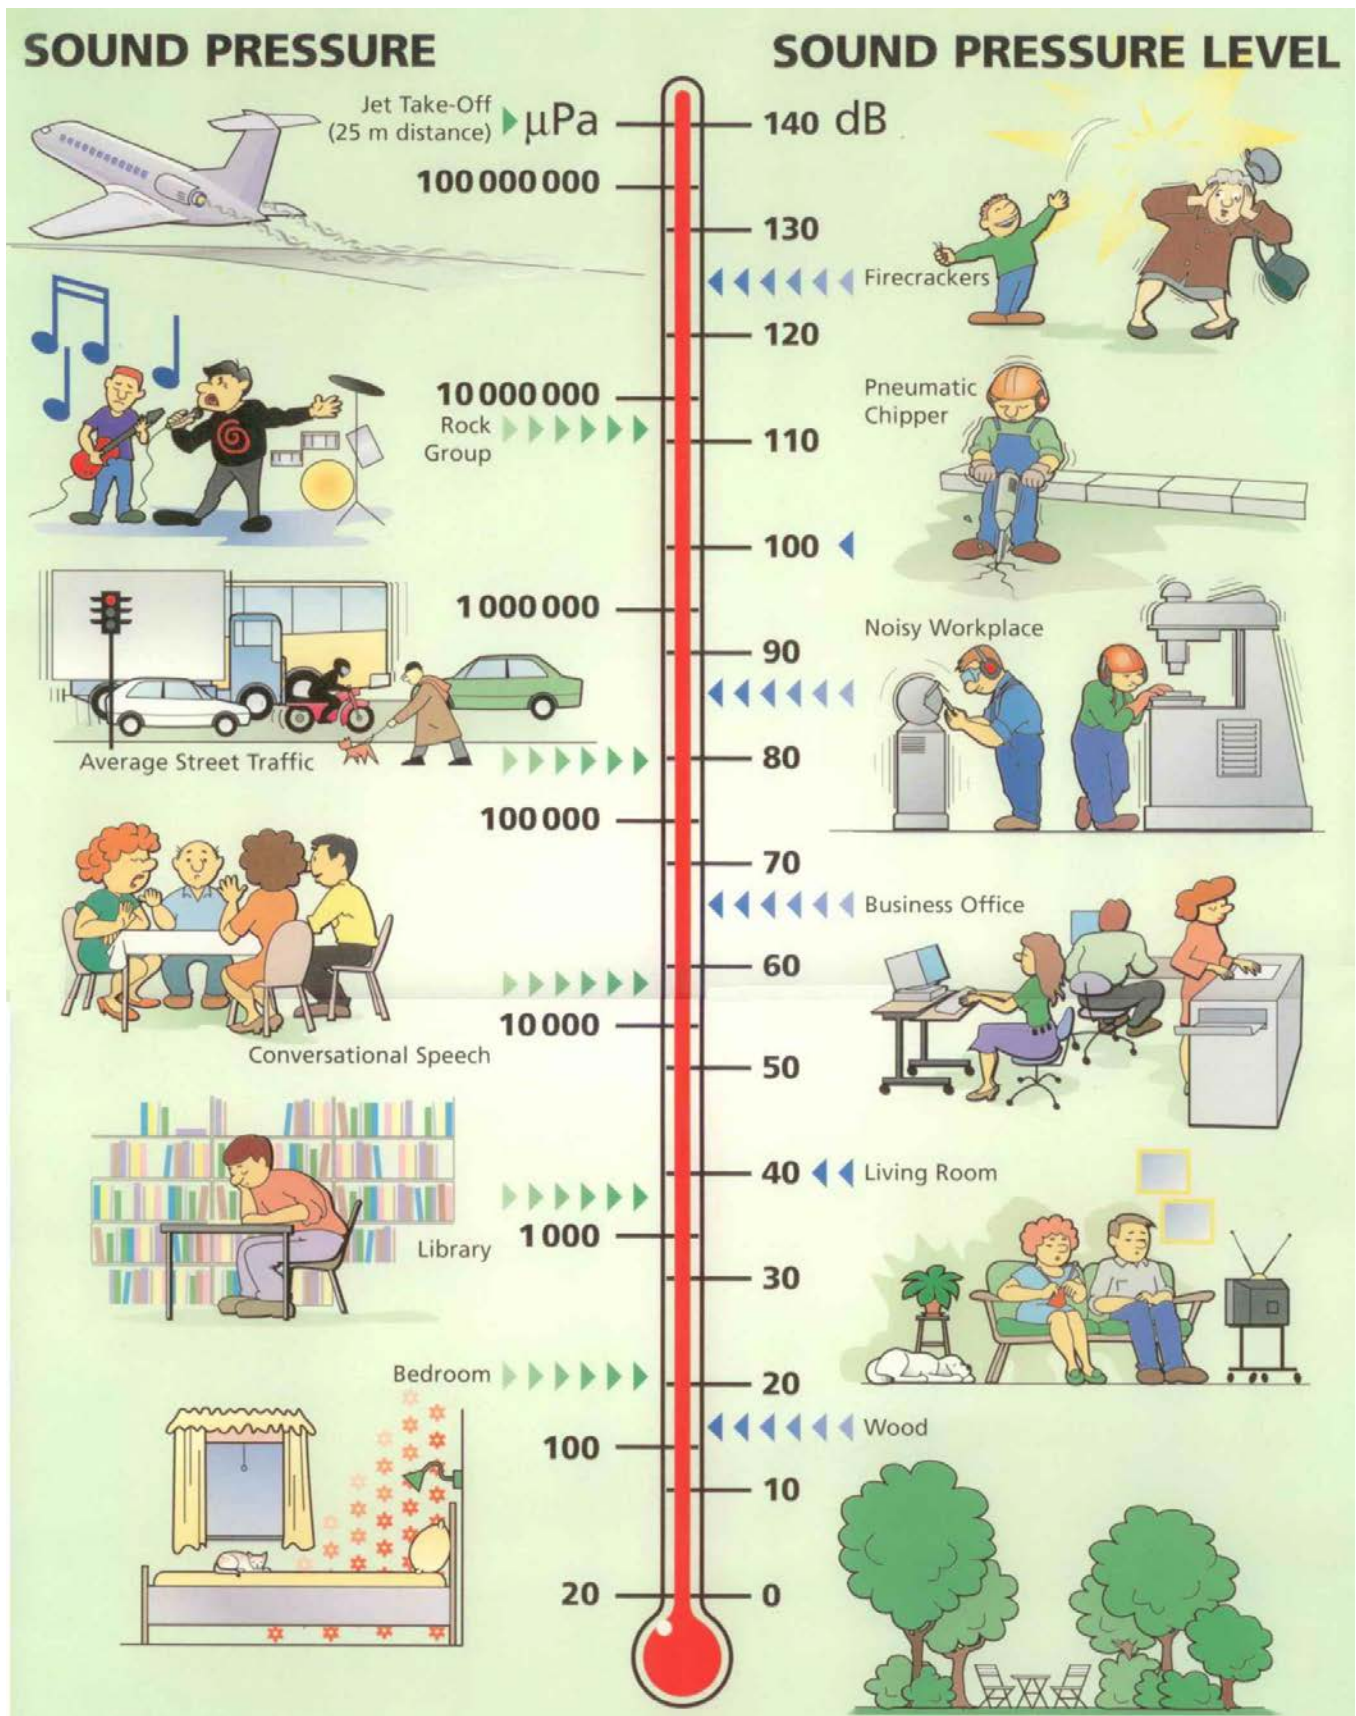


Frequency

The range of frequencies audible to the human ear ranges from approximately 20 Hz to 20 kHz. Within this range, the human ear does not hear equally at all frequencies. It is not very sensitive to low frequency sounds, is very sensitive to mid frequency sounds and is slightly less sensitive to high frequency sounds. Due to the large frequency range of human hearing, the entire spectrum is often divided into 31 bands, each known as a 1/3 octave band.

The internationally agreed upon center frequencies and upper and lower band limits for the 1/1 (whole octave) and 1/3 octave bands are as follows:

<u>Whole Octave</u>			<u>1/3 Octave</u>		
Lower Band Limit	Center Frequency	Upper Band Limit	Lower Band Limit	Center Frequency	Upper Band Limit
11	16	22	14.1	16	17.8
			17.8	20	22.4
			22.4	25	28.2
22	31.5	44	28.2	31.5	35.5
			35.5	40	44.7
			44.7	50	56.2
44	63	88	56.2	63	70.8
			70.8	80	89.1
			89.1	100	112
88	125	177	112	125	141
			141	160	178
			178	200	224
177	250	355	224	250	282
			282	315	355
			355	400	447
355	500	710	447	500	562
			562	630	708
			708	800	891
710	1000	1420	891	1000	1122
			1122	1250	1413
			1413	1600	1778
1420	2000	2840	1778	2000	2239
			2239	2500	2818
			2818	3150	3548
2840	4000	5680	3548	4000	4467
			4467	5000	5623
			5623	6300	7079
5680	8000	11360	7079	8000	8913
			8913	10000	11220
			11220	12500	14130
11360	16000	22720	14130	16000	17780
			17780	20000	22390

Human hearing is most sensitive at approximately 3500 Hz which corresponds to the $\frac{1}{4}$ wavelength of the ear canal (approximately 2.5 cm). Because of this range of sensitivity to various frequencies, we typically apply various weighting networks to the broadband measured sound to more appropriately account for the way humans hear. By default, the most common weighting network used is the so-called “A-weighting”. It can be seen in the figure that the low frequency sounds are reduced significantly with the A-weighting.

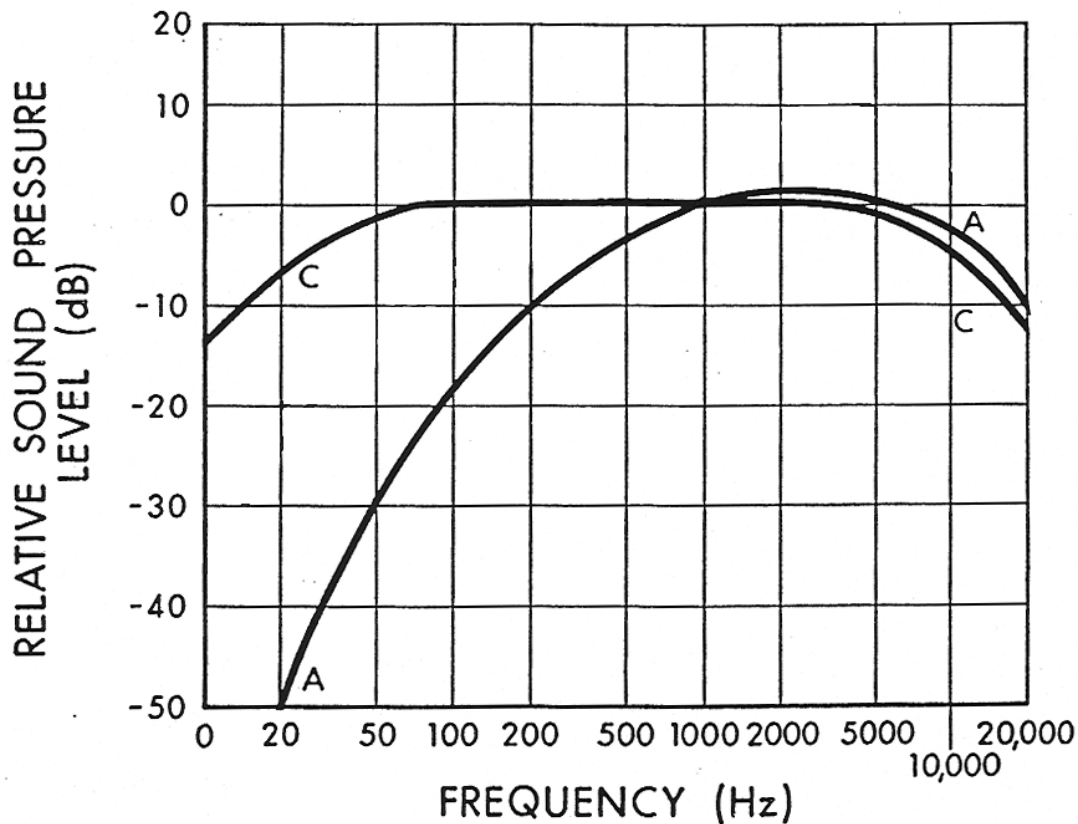

Combination of Sounds

When combining multiple sound sources the general equation is:

$$\Sigma SPL_n = 10 \log_{10} \left[\sum_{i=1}^n 10^{\frac{SPL_i}{10}} \right]$$

Examples:

- Two sources of 50 dB each add together to result in 53 dB.
- Three sources of 50 dB each add together to result in 55 dB.
- Ten sources of 50 dB each add together to result in 60 dB.
- One source of 50 dB added to another source of 40 dB results in 50.4 dB

It can be seen that, if multiple similar sources exist, removing or reducing only one source will have little effect.

Sound Level Measurements

Over the years a number of methods for measuring and describing environmental noise have been developed. The most widely used and accepted is the concept of the Energy Equivalent Sound Level (L_{eq}) which was developed in the US (1970's) to characterize noise levels near US Air-force bases. This is the level of a steady state sound which, for a given period of time, would contain the same energy as the time varying sound. The concept is that the same amount of annoyance occurs from a sound having a high level for a short period of time as from a sound at a lower level for a longer period of time.

The L_{eq} is defined as:

$$L_{eq} = 10 \log_{10} \left[\frac{1}{T} \int_0^T 10^{\frac{dB}{10}} dT \right] = 10 \log_{10} \left[\frac{1}{T} \int_0^T \frac{P^2}{P_{ref}^2} dT \right]$$


We must specify the time period over which to measure the sound. i.e. 1-second, 10-seconds, 15-seconds, 1-minute, 1-day, etc. **An L_{eq} is meaningless if there is no time period associated.**

In general there are a few very common L_{eq} sample durations which are used in describing environmental noise measurements. These include:

- L_{eq24} - Measured over a 24-hour period
- $L_{eqNight}$ - Measured over the night-time (typically 22:00 – 07:00)
- L_{eqDay} - Measured over the day-time (typically 07:00 – 22:00)
- L_{DN} - Same as L_{eq24} with a 10 dB penalty added to the night-time

Statistical Descriptor

Another method of conveying long term noise levels utilizes statistical descriptors. These are calculated from a cumulative distribution of the sound levels over the entire measurement duration and then determining the sound level at xx % of the time.

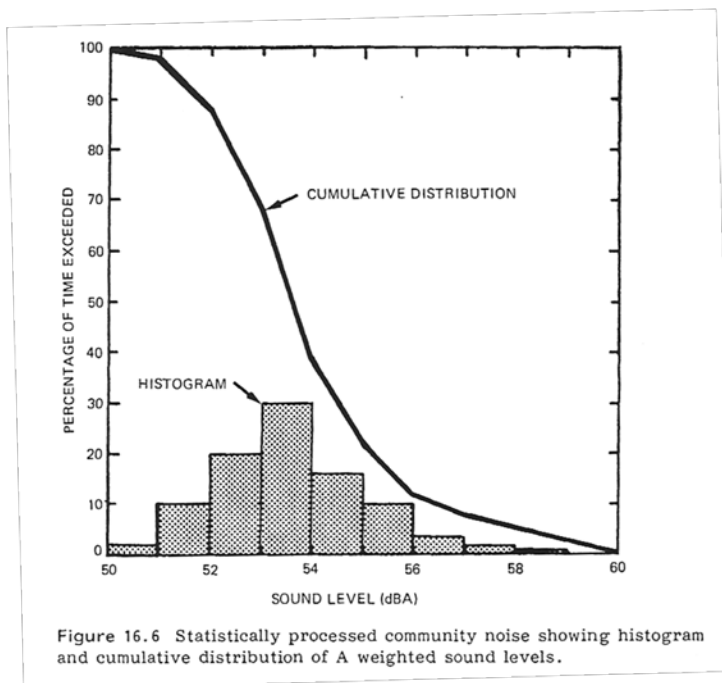

Industrial Noise Control, Lewis Bell, Marcel Dekker, Inc. 1994

The most common statistical descriptors are:

- L_{min} - minimum sound level measured
- L_{01} - sound level that was exceeded only 1% of the time
- L_{10} - sound level that was exceeded only 10% of the time.
 - Good measure of intermittent or intrusive noise
 - Good measure of Traffic Noise
- L_{50} - sound level that was exceeded 50% of the time (arithmetic average)
 - Good to compare to L_{eq} to determine steadiness of noise
- L_{90} - sound level that was exceeded 90% of the time
 - Good indicator of typical “ambient” noise levels
- L_{99} - sound level that was exceeded 99% of the time
- L_{max} - maximum sound level measured

These descriptors can be used to provide a more detailed analysis of the varying noise climate:

- If there is a large difference between the L_{eq} and the L_{50} (L_{eq} can never be any lower than the L_{50}) then it can be surmised that one or more short duration, high level sound(s) occurred during the time period.
- If the gap between the L_{10} and L_{90} is relatively small (less than 15 – 20 dBA) then it can be surmised that the noise climate was relatively steady.

Sound Propagation

In order to understand sound propagation, the nature of the source must first be discussed. In general, there are three types of sources. These are known as ‘point’, ‘line’, and ‘area’. This discussion will concentrate on point and line sources since area sources are much more complex and can usually be approximated by point sources at large distances.

Point Source

As sound radiates from a point source, it dissipates through geometric spreading. The basic relationship between the sound levels at two distances from a point source is:

$$\therefore SPL_1 - SPL_2 = 20 \log_{10} \left(\frac{r_2}{r_1} \right)$$

Where: SPL_1 = sound pressure level at location 1, SPL_2 = sound pressure level at location 2
 r_1 = distance from source to location 1, r_2 = distance from source to location 2

Thus, the reduction in sound pressure level for a point source radiating in a free field is **6 dB per doubling of distance**. This relationship is independent of reflectivity factors provided they are always present. Note that this only considers geometric spreading and does not take into account atmospheric effects. Point sources still have some physical dimension associated with them, and typically do not radiate sound equally in all directions in all frequencies. The directionality of a source is also highly dependent on frequency. As frequency increases, directionality increases.

Examples (note no atmospheric absorption):

- A point source measuring 50 dB at 100m will be 44 dB at 200m.
- A point source measuring 50 dB at 100m will be 40.5 dB at 300m.
- A point source measuring 50 dB at 100m will be 38 dB at 400m.
- A point source measuring 50 dB at 100m will be 30 dB at 1000m.

Line Source

A line source is similar to a point source in that it dissipates through geometric spreading. The difference is that a line source is equivalent to a long line of many point sources. The basic relationship between the sound levels at two distances from a line source is:

$$SPL_1 - SPL_2 = 10 \log_{10} \left(\frac{r_2}{r_1} \right)$$

The difference from the point source is that the ‘20’ term in front of the ‘log’ is now only 10. Thus, the reduction in sound pressure level for a line source radiating in a free field is **3 dB per doubling of distance**.

Examples (note no atmospheric absorption):

- A line source measuring 50 dB at 100m will be 47 dB at 200m.
- A line source measuring 50 dB at 100m will be 45 dB at 300m.
- A line source measuring 50 dB at 100m will be 44 dB at 400m.
- A line source measuring 50 dB at 100m will be 40 dB at 1000m.

Atmospheric Absorption


As sound transmits through a medium, there is an attenuation (or dissipation of acoustic energy) which can be attributed to three mechanisms:

- 1) **Viscous Effects** - Dissipation of acoustic energy due to fluid friction which results in thermodynamically irreversible propagation of sound.
- 2) **Heat Conduction Effects** - Heat transfer between high and low temperature regions in the wave which result in non-adiabatic propagation of the sound.
- 3) **Inter Molecular Energy Interchanges** - Molecular energy relaxation effects which result in a time lag between changes in translational kinetic energy and the energy associated with rotation and vibration of the molecules.

The following table illustrates the attenuation coefficient of sound at standard pressure (101.325 kPa) in units of dB/100m.

Temperature °C	Relative Humidity (%)	Frequency (Hz)					
		125	250	500	1000	2000	4000
30	20	0.06	0.18	0.37	0.64	1.40	4.40
	50	0.03	0.10	0.33	0.75	1.30	2.50
	90	0.02	0.06	0.24	0.70	1.50	2.60
20	20	0.07	0.15	0.27	0.62	1.90	6.70
	50	0.04	0.12	0.28	0.50	1.00	2.80
	90	0.02	0.08	0.26	0.56	0.99	2.10
10	20	0.06	0.11	0.29	0.94	3.20	9.00
	50	0.04	0.11	0.20	0.41	1.20	4.20
	90	0.03	0.10	0.21	0.38	0.81	2.50
0	20	0.05	0.15	0.50	1.60	3.70	5.70
	50	0.04	0.08	0.19	0.60	2.10	6.70
	90	0.03	0.08	0.15	0.36	1.10	4.10

- As frequency increases, absorption tends to increase
- As Relative Humidity increases, absorption tends to decrease
- There is no direct relationship between absorption and temperature
- **The net result of atmospheric absorption is to modify the sound propagation of a point source from 6 dB/doubling-of-distance to approximately 7 – 8 dB/doubling-of-distance (based on anecdotal experience)**

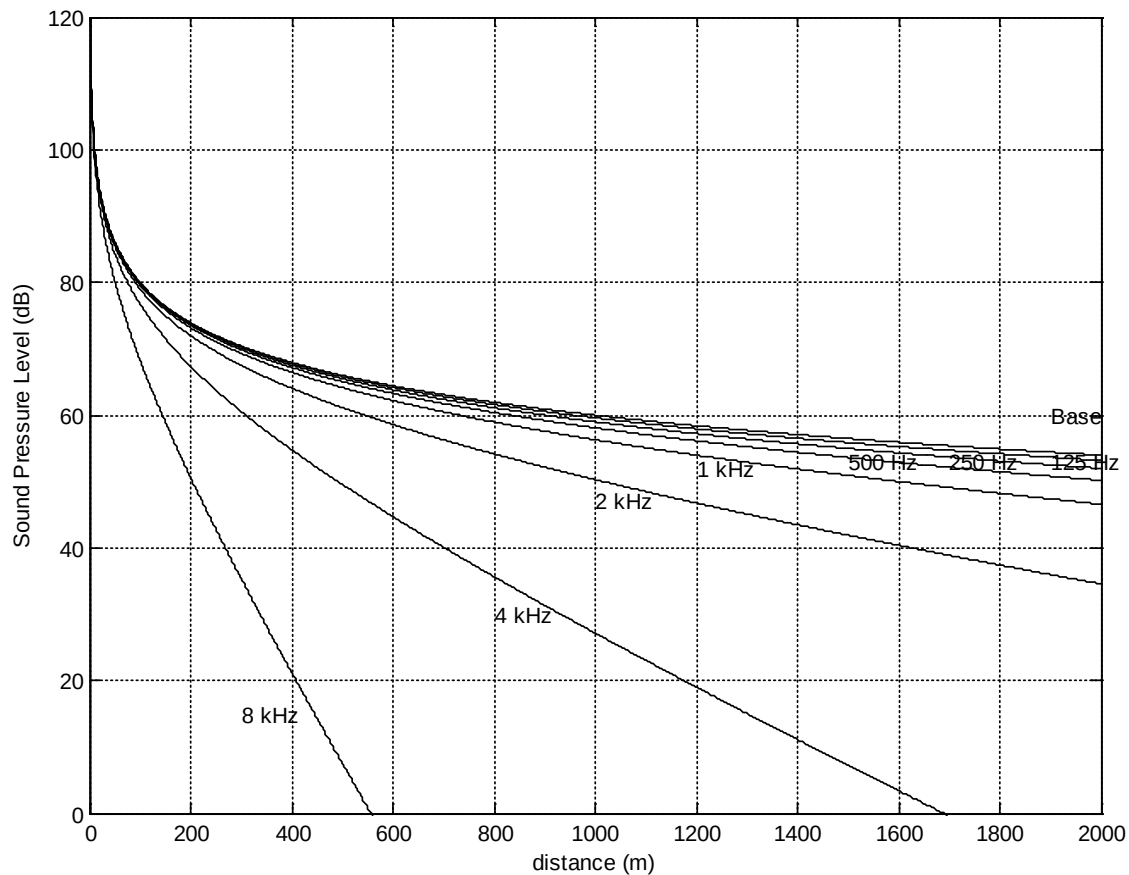

Atmospheric Absorption at 10°C and 70% RH

Meteorological Effects

There are many meteorological factors which can affect how sound propagates over large distances. These various phenomena must be considered when trying to determine the relative impact of a noise source either after installation or during the design stage.

Wind

- Can greatly alter the noise climate away from a source depending on direction
- Sound levels downwind from a source can be increased due to refraction of sound back down towards the surface. This is due to the generally higher velocities as altitude increases.
- Sound levels upwind from a source can be decreased due to a “bending” of the sound away from the earth’s surface.
- Sound level differences of $\pm 10\text{dB}$ are possible depending on severity of wind and distance from source.
- Sound levels crosswind are generally not disturbed by an appreciable amount
- Wind tends to generate its own noise, however, and can provide a high degree of masking relative to a noise source of particular interest.

Temperature

- Temperature effects can be similar to wind effects
- Typically, the temperature is warmer at ground level than it is at higher elevations.
- If there is a very large difference between the ground temperature (very warm) and the air aloft (only a few hundred meters) then the transmitted sound refracts upward due to the changing speed of sound.
- If the air aloft is warmer than the ground temperature (known as an *inversion*) the resulting higher speed of sound aloft tends to refract the transmitted sound back down towards the ground. This essentially works on Snell’s law of reflection and refraction.
- Temperature inversions typically happen early in the morning and are most common over large bodies of water or across river valleys.
- Sound level differences of $\pm 10\text{dB}$ are possible depending on gradient of temperature and distance from source.

Rain

- Rain does not affect sound propagation by an appreciable amount unless it is very heavy
- The larger concern is the noise generated by the rain itself. A heavy rain striking the ground can cause a significant amount of highly broadband noise. The amount of noise generated is difficult to predict.
- Rain can also affect the output of various noise sources such as vehicle traffic.

Summary

- In general, these wind and temperature effects are difficult to predict
- Empirical models (based on measured data) have been generated to attempt to account for these effects.
- Environmental noise measurements must be conducted with these effects in mind. Sometimes it is desired to have completely calm conditions, other times a “worst case” of downwind noise levels are desired.

Topographical Effects

Similar to the various atmospheric effects outlined in the previous section, the effect of various geographical and vegetative factors must also be considered when examining the propagation of noise over large distances.

Topography

- One of the most important factors in sound propagation.
- Can provide a natural barrier between source and receiver (i.e. if berm or hill in between).
- Can provide a natural amplifier between source and receiver (i.e. large valley in between or hard reflective surface in between).
- Must look at location of topographical features relative to source and receiver to determine importance (i.e. small berm 1km away from source and 1km away from receiver will make negligible impact).

Grass


- Can be an effective absorber due to large area covered
- Only effective at low height above ground. Does not affect sound transmitted direct from source to receiver if there is line of sight.
- Typically less absorption than atmospheric absorption when there is line of sight.
- Approximate rule of thumb based on empirical data is:

$$A_g = 18 \log_{10}(f) - 31 \quad (\text{dB}/100\text{m})$$

Where: A_g is the absorption amount

Trees

- Provide absorption due to foliage
- Deciduous trees are essentially ineffective in the winter
- Absorption depends heavily on density and height of trees
- No data found on absorption of various kinds of trees
- Large spans of trees are required to obtain even minor amounts of sound reduction
- In many cases, trees can provide an effective visual barrier, even if the noise attenuation is negligible.

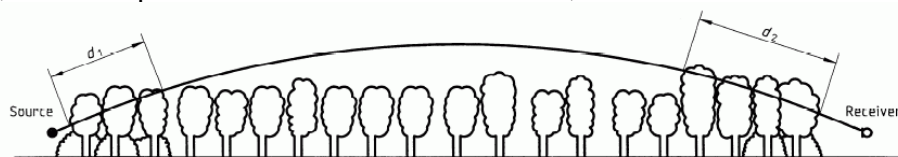

NOTE — $d_t = d_1 + d_2$

For calculating d_1 and d_2 , the curved path radius may be assumed to be 5 km.

Figure A.1 — Attenuation due to propagation through foliage increases linearly with propagation distance d_t through the foliage

Table A.1 — Attenuation of an octave band of noise due to propagation a distance d_t through dense foliage

Propagation distance d_t m	Nominal midband frequency Hz							
	63	125	250	500	1 000	2 000	4 000	8 000
$10 \leq d_t \leq 20$	Attenuation, dB: 0		1	1	1	1	2	3
$20 \leq d_t \leq 200$	Attenuation, dB/m: 0.02		0.03	0.04	0.05	0.06	0.08	0.12

Tree/Foliage attenuation from ISO 9613-2:1996

Bodies of Water

- Large bodies of water can provide the opposite effect to grass and trees.
- Reflections caused by small incidence angles (grazing) can result in larger sound levels at great distances (increased reflectivity, Q).
- Typically air temperatures are warmer high aloft since air temperatures near water surface tend to be more constant. Result is a high probability of temperature inversion.
- Sound levels can “carry” much further.

Snow

- Covers the ground for approximately 1/2 of the year in northern climates.
- Can act as an absorber or reflector (and varying degrees in between).
- Freshly fallen snow can be quite absorptive.
- Snow which has been sitting for a while and hard packed due to wind can be quite reflective.
- Falling snow can be more absorptive than rain, but does not tend to produce its own noise.
- Snow can cover grass which might have provided some means of absorption.
- Typically sound propagates with less impedance in winter due to hard snow on ground and no foliage on trees/shrubs.

Appendix III SOUND LEVELS OF FAMILIAR NOISE SOURCES

Used with Permission Obtained from the Alberta Energy Regulator Directive 038 (February, 2007)

Source¹	Sound Level (dBA)
Bedroom of a country home	30
Soft whisper at 1.5 m	30
Quiet office or living room	40
Moderate rainfall	50
Inside average urban home	50
Quiet street	50
Normal conversation at 1 m	60
Noisy office	60
Noisy restaurant	70
Highway traffic at 15 m	75
Loud singing at 1 m	75
Tractor at 15 m	78-95
Busy traffic intersection	80
Electric typewriter	80
Bus or heavy truck at 15 m	88-94
Jackhammer	88-98
Loud shout	90
Freight train at 15 m	95
Modified motorcycle	95
Jet taking off at 600 m	100
Amplified rock music	110
Jet taking off at 60 m	120
Air-raid siren	130

¹ Cottrell, Tom, 1980, *Noise in Alberta*, Table 1, p.8, ECA80 - 16/1B4 (Edmonton: Environment Council of Alberta).

SOUND LEVELS GENERATED BY COMMON APPLIANCES

Used with Permission Obtained from the Alberta Energy Regulator Directive 038 (February, 2007)

Source¹	Sound level at 3 feet (dBA)
Freezer	38-45
Refrigerator	34-53
Electric heater	47
Hair clipper	50
Electric toothbrush	48-57
Humidifier	41-54
Clothes dryer	51-65
Air conditioner	50-67
Electric shaver	47-68
Water faucet	62
Hair dryer	58-64
Clothes washer	48-73
Dishwasher	59-71
Electric can opener	60-70
Food mixer	59-75
Electric knife	65-75
Electric knife sharpener	72
Sewing machine	70-74
Vacuum cleaner	65-80
Food blender	65-85
Coffee mill	75-79
Food waste disposer	69-90
Edger and trimmer	81
Home shop tools	64-95
Hedge clippers	85
Electric lawn mower	80-90

¹ Reif, Z. F., and Vermeulen, P. J., 1979, "Noise from domestic appliances, construction, and industry," Table 1, p.166, in Jones, H. W., ed., *Noise in the Human Environment*, vol. 2, ECA79-SP/1 (Edmonton: Environment Council of Alberta).

Appendix IV NOISE MODELING PARAMETERS

Baseline Case Volumes

Road	Day (Vehicles Per Hour)	Day % Heavy Vehicles	Night (Vehicles Per Hour)	Night % Heavy Vehicles	Speed (km/hr)	Total Volume (AADT)
Boudreau Road (East of Campbell Road) WB	823	2.0	152	2.0	60	13713
Boudreau Road (East of Campbell Road) EB	823	2.0	152	2.0	40	13713
Hebert Road	1581	5.0	809	5.0	60	30996
Internal Collector	84	2	16	2.0	40	1400

Future Case Volumes

Road	Day (Vehicles Per Hour)	Day % Heavy Vehicles	Night (Vehicles Per Hour)	Night % Heavy Vehicles	Speed (km/hr)	Total Volume (AADT)
Boudreau Road (East of Campbell Road) WB	1497	2.0	277	2.0	60	24953
Boudreau Road (East of Campbell Road) EB	1497	2.0	277	2.0	40	24953
Hebert Road	2877	5.0	1472	5.0	60	56403
Internal Collector	84	2	16	2.0	40	1400

Noise Modeling Parameters

Parameter	Value
Modeling Software	CADNA/A (Version 2024 MR1, build: 205.5427)
Standard Followed	ISO 9613-2
Ground Sound Absorption Coefficient	0.6
Wind Speed	1 - 5 m/s (3.6 - 18 km/hr)
Wind Direction	Downwind from all sources to all receptors
Temperature	10 °C
Humidity	70%
Topography	Digital Terrain Model Contours provided by Client

Appendix V DATA REMOVAL

Data Removal Noise Monitoring Location #1

Start Time	End Time	Leq (dBA)	Duration (min)	Reason
6/02/21 12:11	6/02/21 12:11	76.6	0.50	Loud Vehicle Pass-by
6/02/21 14:37	6/02/21 14:38	70.3	1.00	Loud Vehicle Pass-by
6/02/21 17:41	6/02/21 17:41	66.6	0.75	Loud Vehicle Pass-by
6/02/21 19:16	6/02/21 19:17	74.3	1.00	Emergency Sirens
6/02/21 21:21	6/02/21 21:21	66.3	0.50	Loud Vehicle Pass-by
6/02/21 22:57	6/02/21 22:59	73.4	1.50	Emergency Sirens
6/02/21 23:47	6/02/21 23:47	63.4	0.50	Loud Vehicle Pass-by
6/03/21 0:10	6/03/21 0:10	61.2	0.75	Loud Vehicle Pass-by
6/03/21 0:55	6/03/21 0:55	69.2	0.25	Loud Vehicle Pass-by
6/03/21 2:53	6/03/21 2:54	60.4	0.50	Loud Vehicle Pass-by
6/03/21 3:25	6/03/21 3:25	59.1	0.50	Loud Vehicle Pass-by
6/03/21 5:19	6/03/21 5:20	64.2	1.00	Excessive Bird Noise
6/03/21 6:05	6/03/21 6:05	63.6	0.50	Excessive Bird Noise
6/03/21 6:19	6/03/21 6:19	86.9	0.25	Excessive Bird Noise
6/03/21 7:00	6/03/21 7:02	73.9	1.25	Emergency Sirens
Total Time of Data Removed			10.75	

Data Removal Noise Monitoring Location #2



Start Time	End Time	Leq (dBA)	Duration (min)	Reason
6/02/21 12:11	6/02/21 12:11	64.9	0.50	Loud Vehicle Pass-by
6/02/21 13:49	6/02/21 13:50	63.8	0.75	Aircraft Flyover
6/02/21 14:37	6/02/21 14:37	67.9	0.50	Loud Vehicle Pass-by
6/02/21 19:16	6/02/21 19:17	73.0	1.00	Emergency Sirens
6/02/21 21:21	6/02/21 21:22	66.4	0.75	Loud Vehicle Pass-by
6/02/21 22:58	6/02/21 22:59	72.0	1.25	Emergency Sirens
6/02/21 23:08	6/02/21 23:08	63.7	0.50	Loud Vehicle Pass-by
6/03/21 2:53	6/03/21 2:54	59.1	1.00	Loud Vehicle Pass-by
6/03/21 7:01	6/03/21 7:02	71.7	1.25	Emergency Sirens
6/03/21 10:22	6/03/21 10:23	63.4	0.75	Aircraft Flyover
Total Time of Data Removed			8.25	


Data Removal Noise Monitoring Location #3

Start Time	End Time	Leq (dBA)	Duration (min)	Reason
12/08/24 22:12	12/08/24 22:13	69.6	1	Loud Vehicle Passby
12/08/24 22:44	12/08/24 22:45	64.6	0.75	Loud Vehicle Passby
12/08/24 22:59	12/08/24 23:00	68.1	0.5	Loud Vehicle Passby
12/09/24 02:41	12/09/24 02:42	61.8	1.25	Loud Vehicle Passby
12/09/24 07:40	12/09/24 07:42	75.4	1.75	Loud Vehicle Passby
12/09/24 12:59	12/09/24 12:59	71.7	0.75	Loud Vehicle Passby
12/09/24 13:05	12/09/24 13:05	71.9	0.75	Loud Vehicle Passby
12/09/24 14:22	12/09/24 14:23	69.2	1	Loud Vehicle Passby
12/09/24 19:33	12/09/24 19:34	74.0	0.75	Loud Vehicle Passby
12/09/24 20:15	12/09/24 20:16	67.7	1.25	Loud Vehicle Passby
Total Time of Data Removed			9.75	


Data Removal Noise Monitoring Location #4

Start Time	End Time	Leq (dBA)	Duration (min)	Reason
6/20/24 05:50	6/20/24 05:52	69.1	2	Loud Vehicle Passby
6/20/24 07:03	6/20/24 07:03	69.7	0.5	Loud Vehicle Passby
6/20/24 07:29	6/20/24 07:29	73.0	0.75	Loud Vehicle Passby
6/20/24 07:37	6/20/24 07:37	69.7	0.5	Excessive Bird Noise
6/20/24 07:40	6/20/24 07:41	74.2	0.75	Emergency Sirens
6/20/24 12:37	6/20/24 12:37	69.3	0.5	Loud Vehicle Passby
6/20/24 13:37	6/20/24 13:38	65.9	1.25	Loud Vehicle Passby
6/20/24 15:34	6/20/24 15:35	66.6	0.5	Loud Vehicle Passby
6/20/24 18:25	6/20/24 18:25	80.2	0.25	Loud Vehicle Passby
6/20/24 19:57	6/20/24 19:58	68.5	0.5	Loud Vehicle Passby
Total Time of Data Removed			7.5	

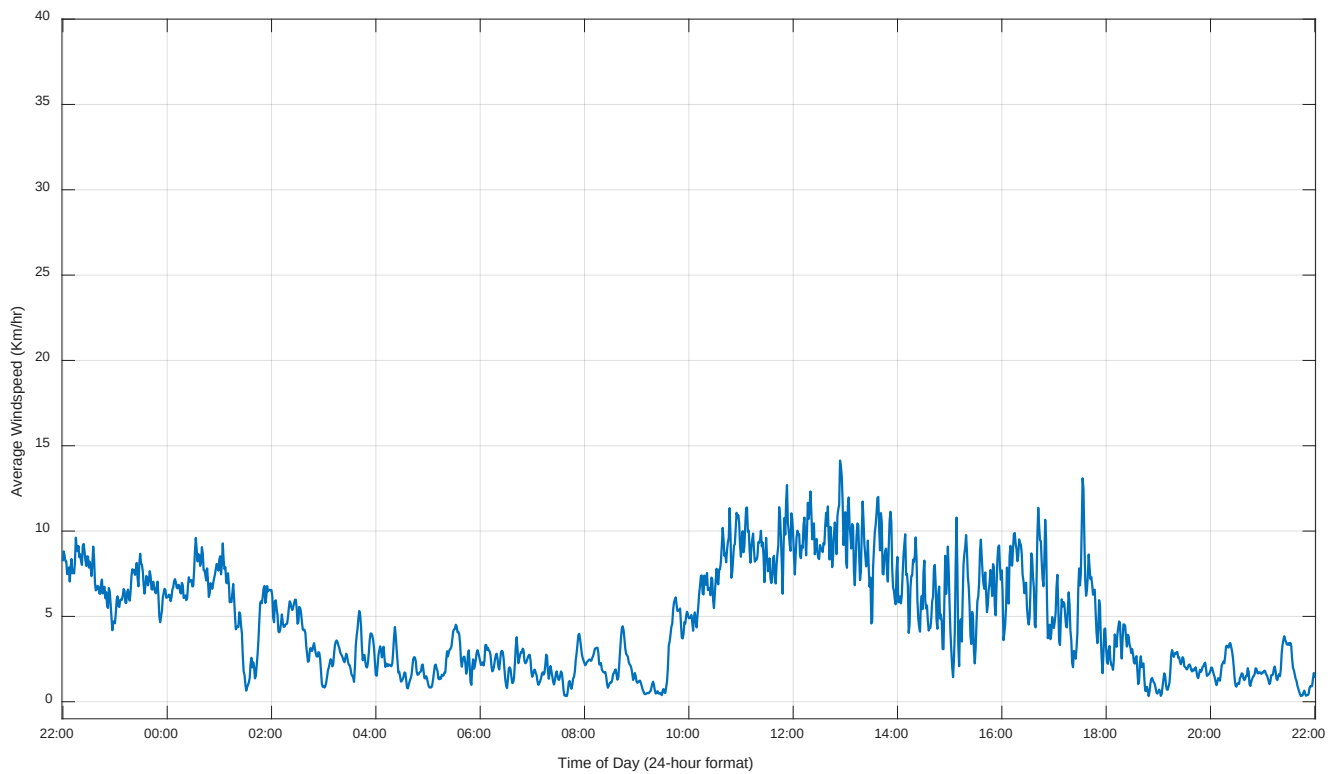
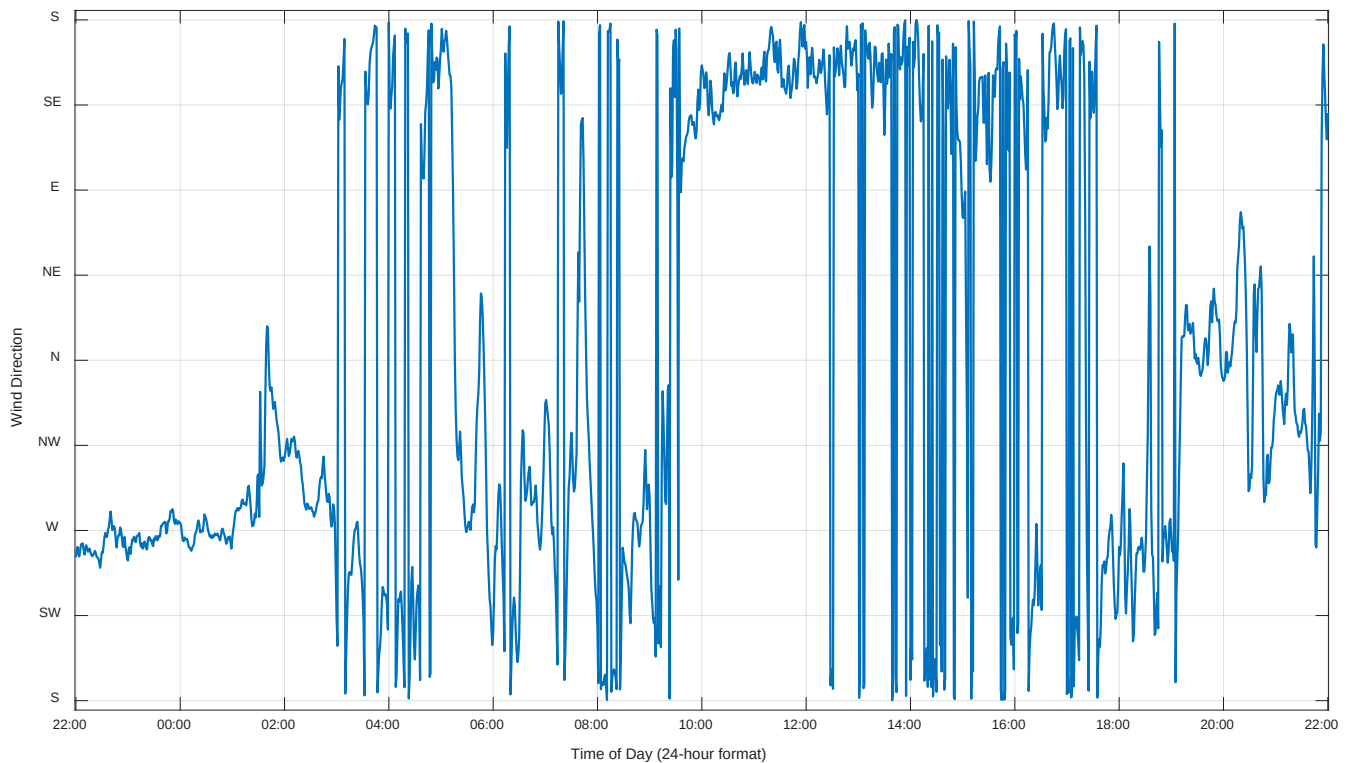
Appendix VI WEATHER DATA**Monitored Wind Speed (October 6 – 7, 2021)****Monitored Wind Direction (October 6 – 7, 2021)**


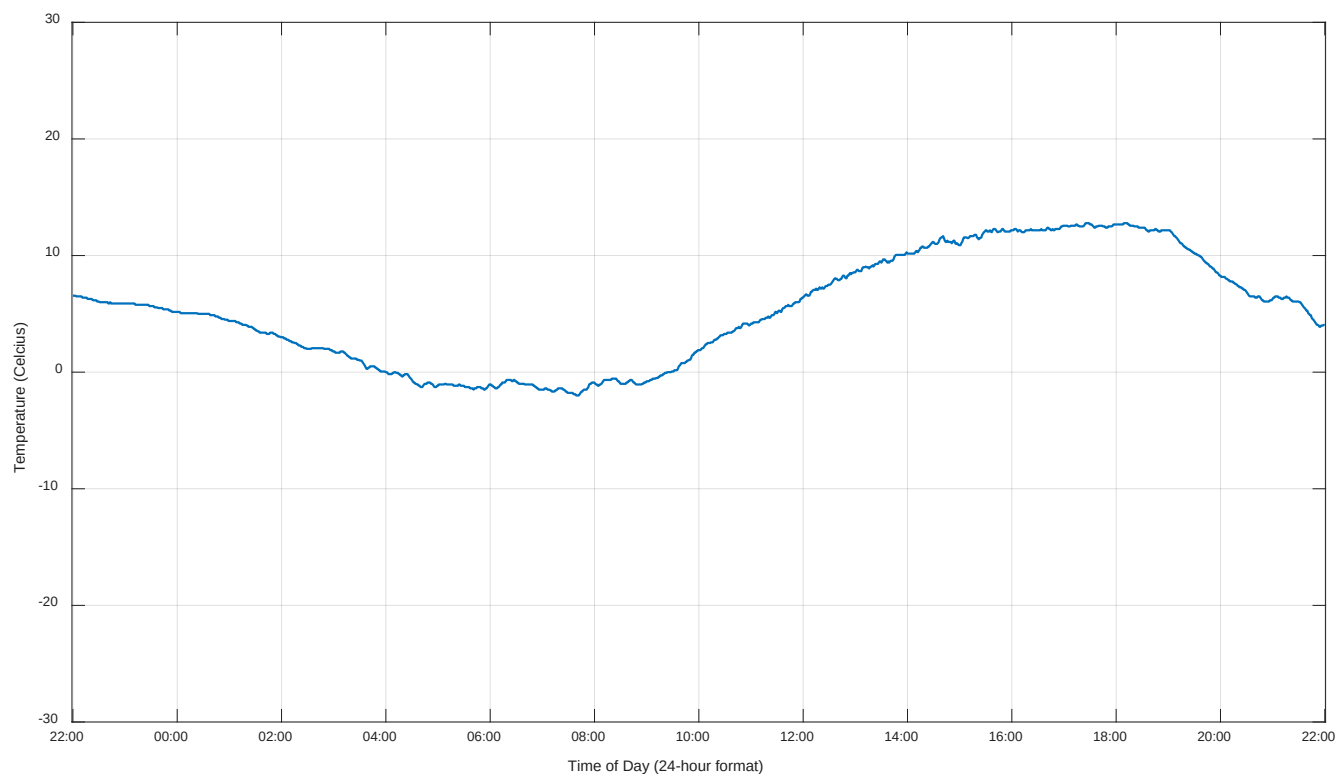


Monitored Temperature (October 6 – 7, 2021)

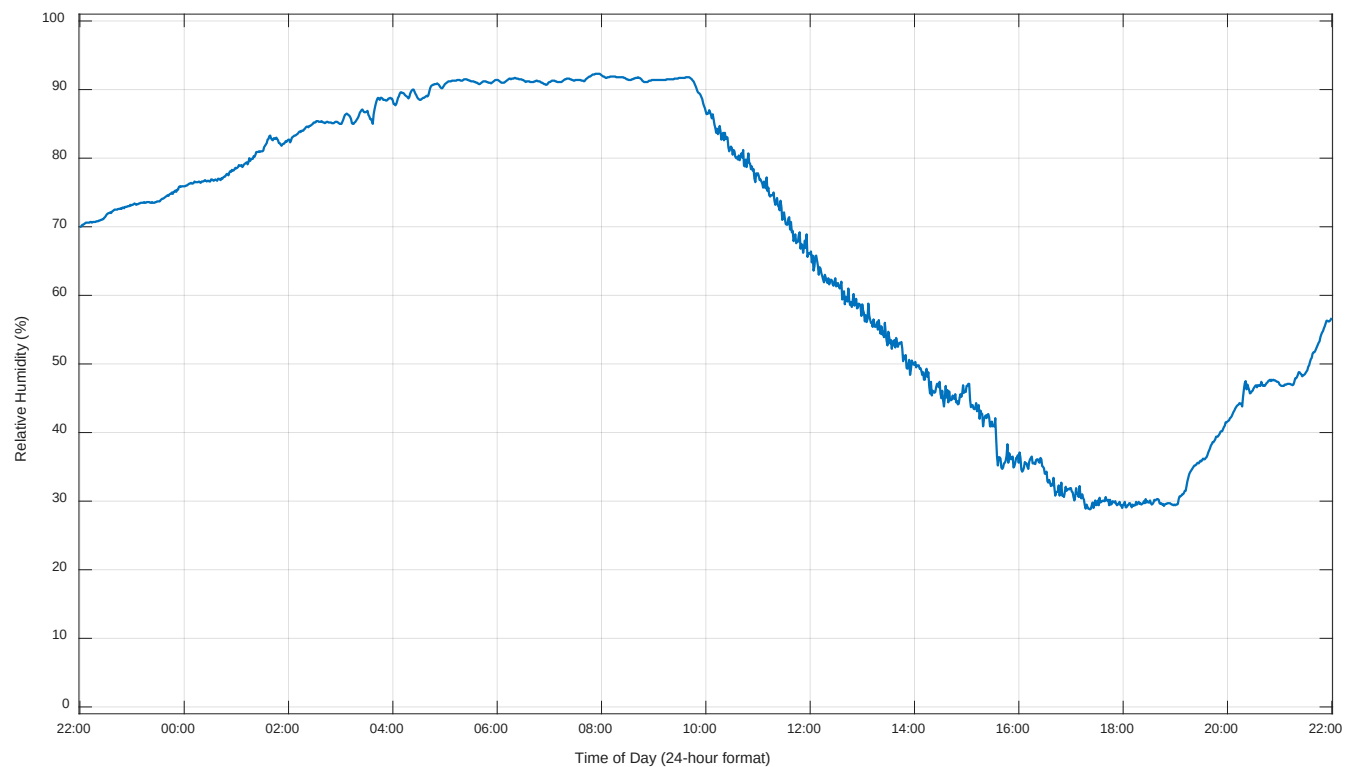

Monitored Humidity (October 6 – 7, 2021)

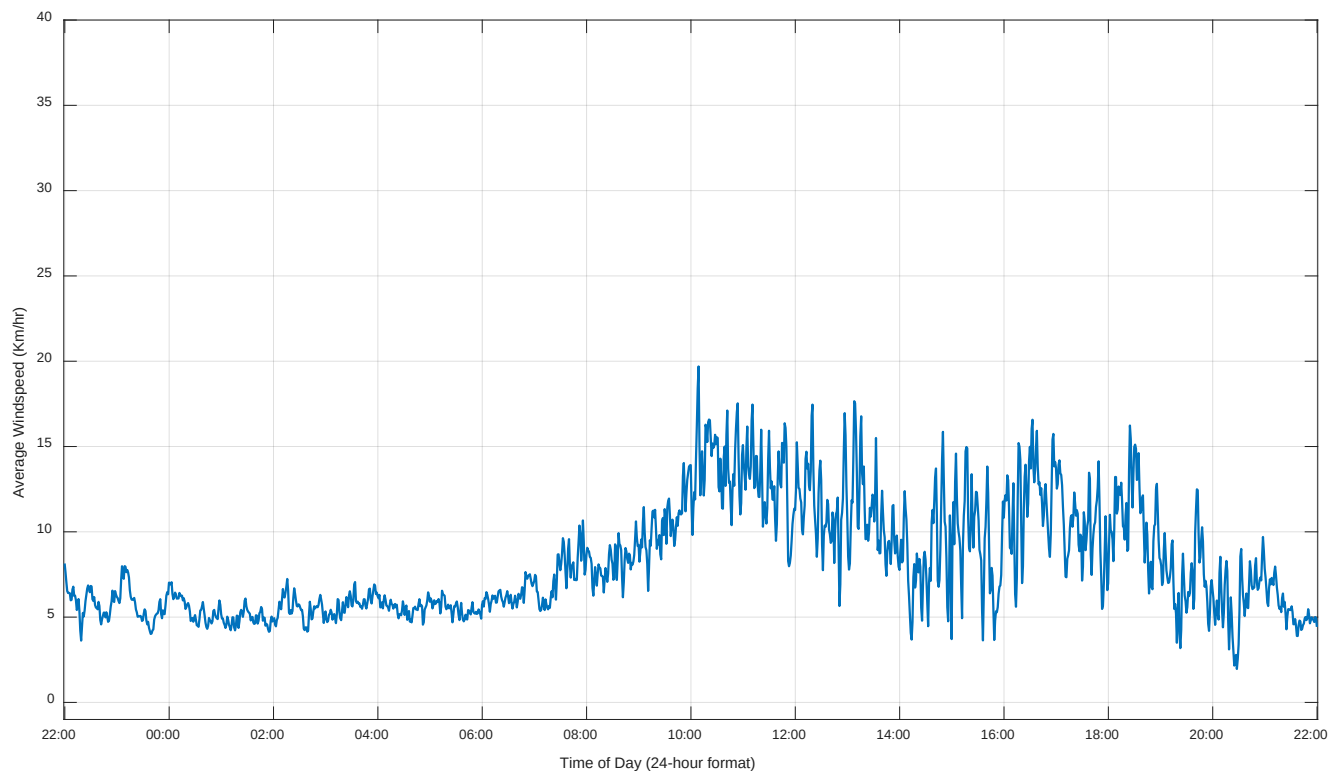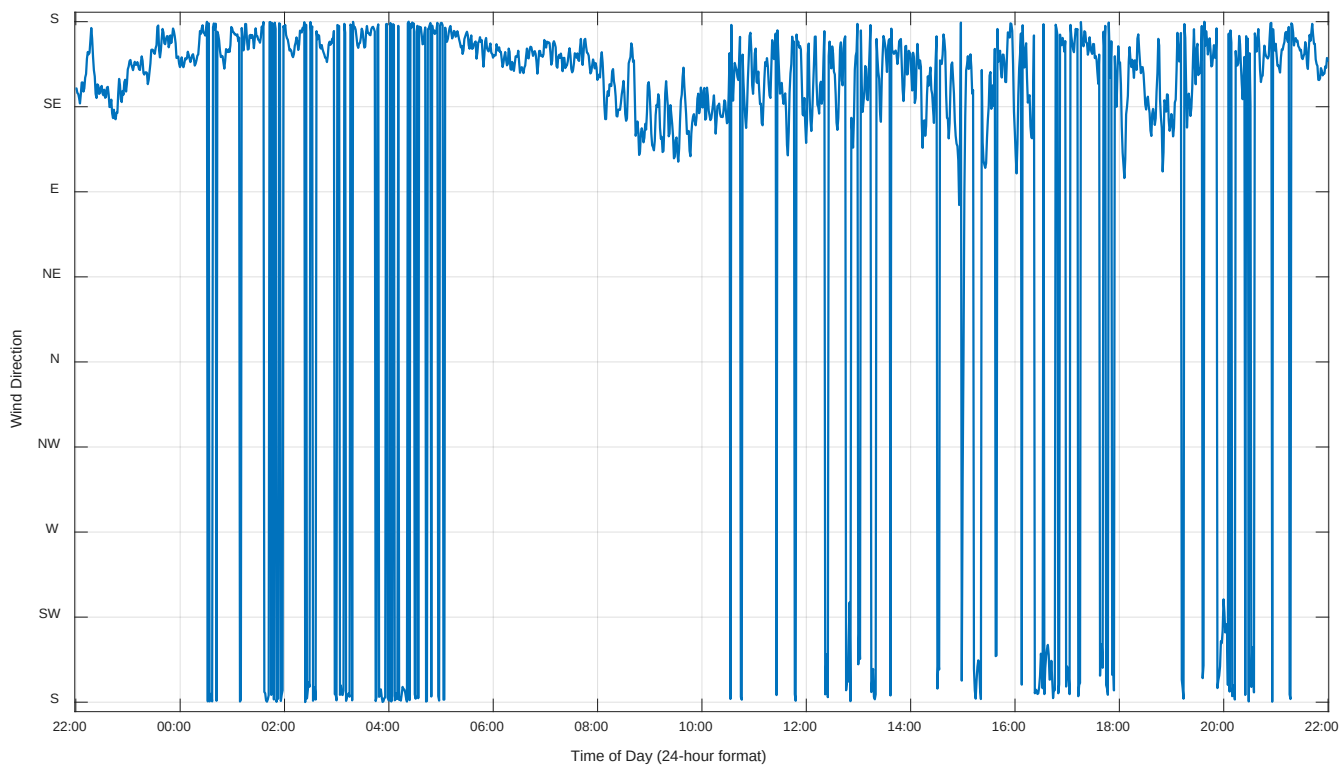**Monitored Wind Speed (June 19 - 20, 2024)****Monitored Wind Direction (June 19 - 20, 2024)**

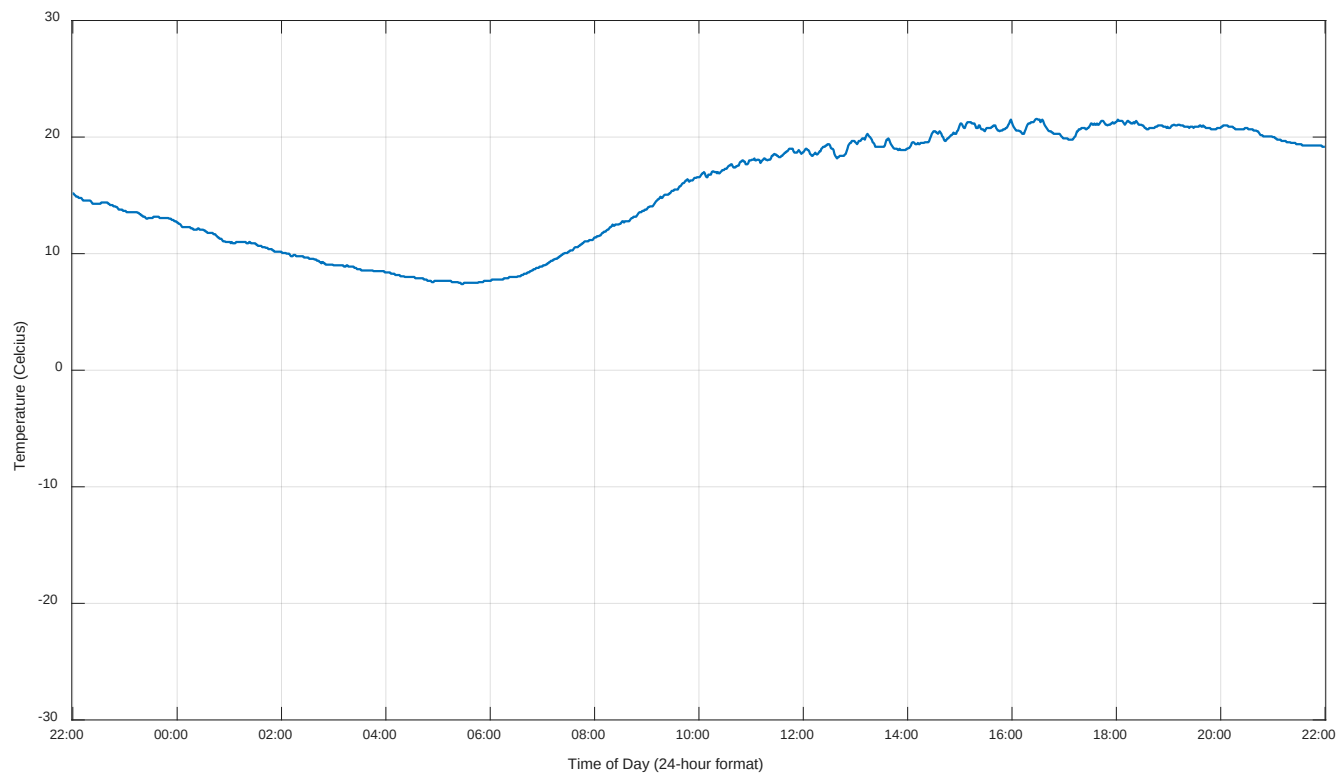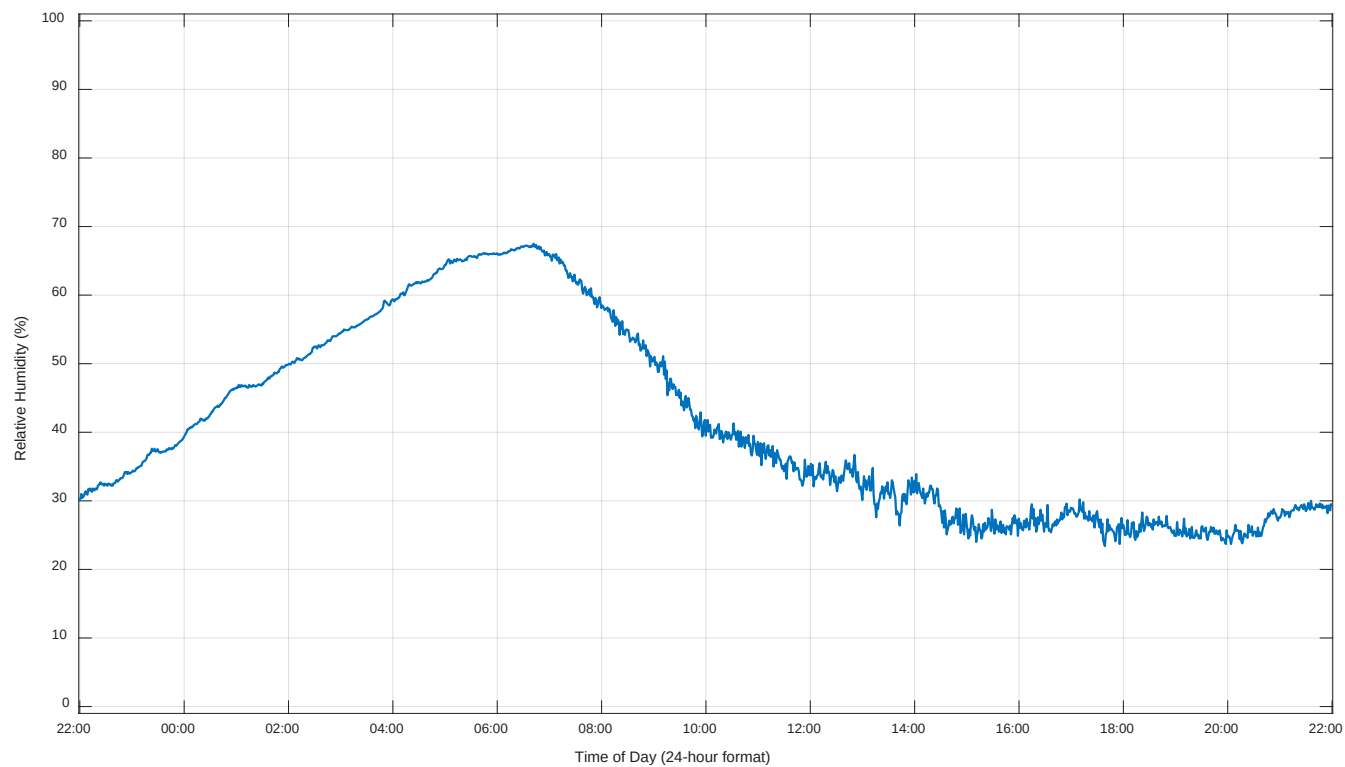**Monitored Temperature (June 19 - 20, 2024)****Monitored Humidity (June 19 - 20, 2024)**