


REVERSE (INSIDE VIEW)


FRONT

REINFORCEMENT
2 x 6 CONSTRUCTION GRADE
LUMBER, THRU BOLTED TO
SIDE BOARDS AT TOP, TO BE
PAINTED REFLECTIVE RED.


SIDE BOARDS
MIN. 3/4" (19mm) CONSTRUCTION
GRADE PLYWOOD, PARTICLE BOARD
AND OSB ARE NOT ACCEPTABLE.

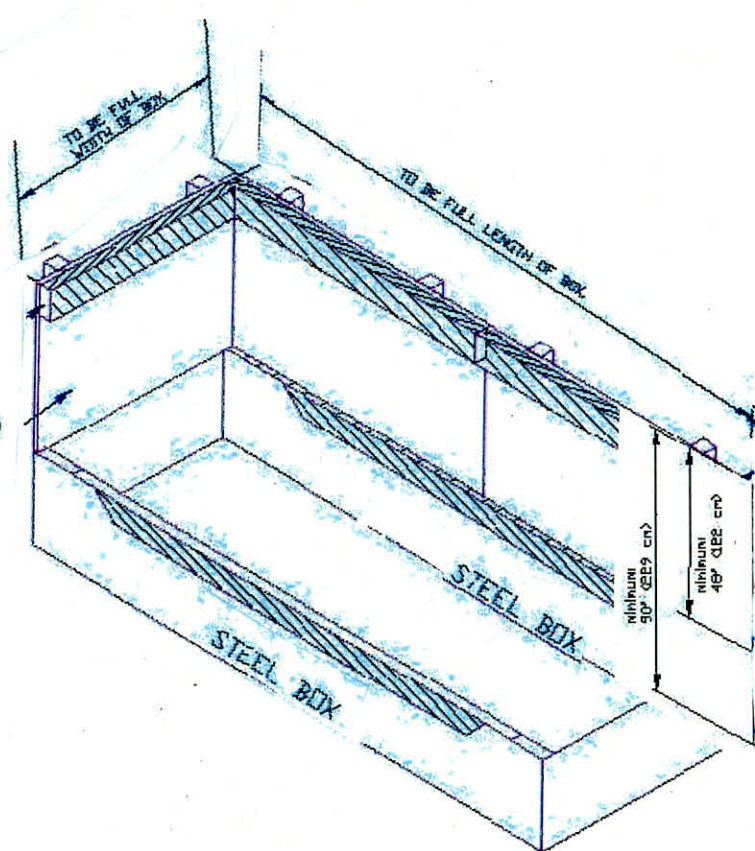


REAR

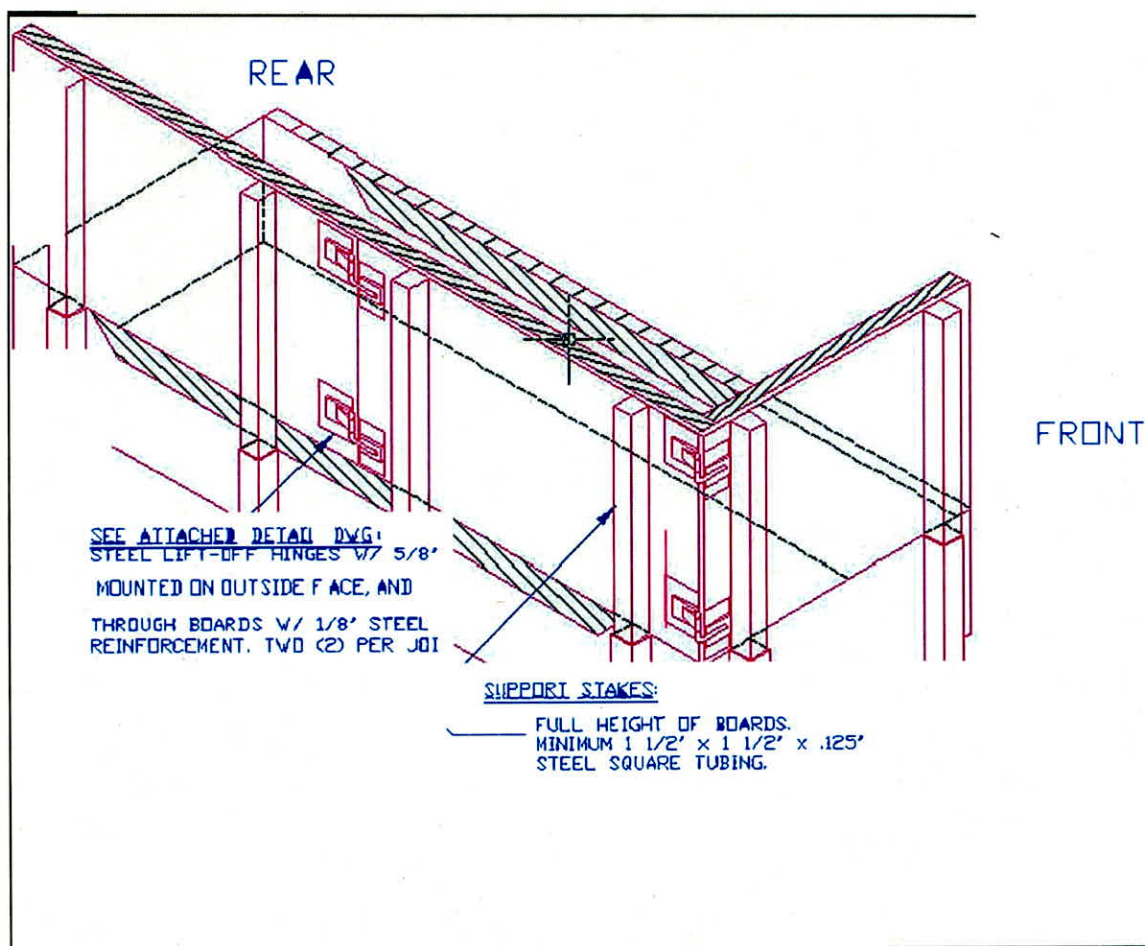


REAR

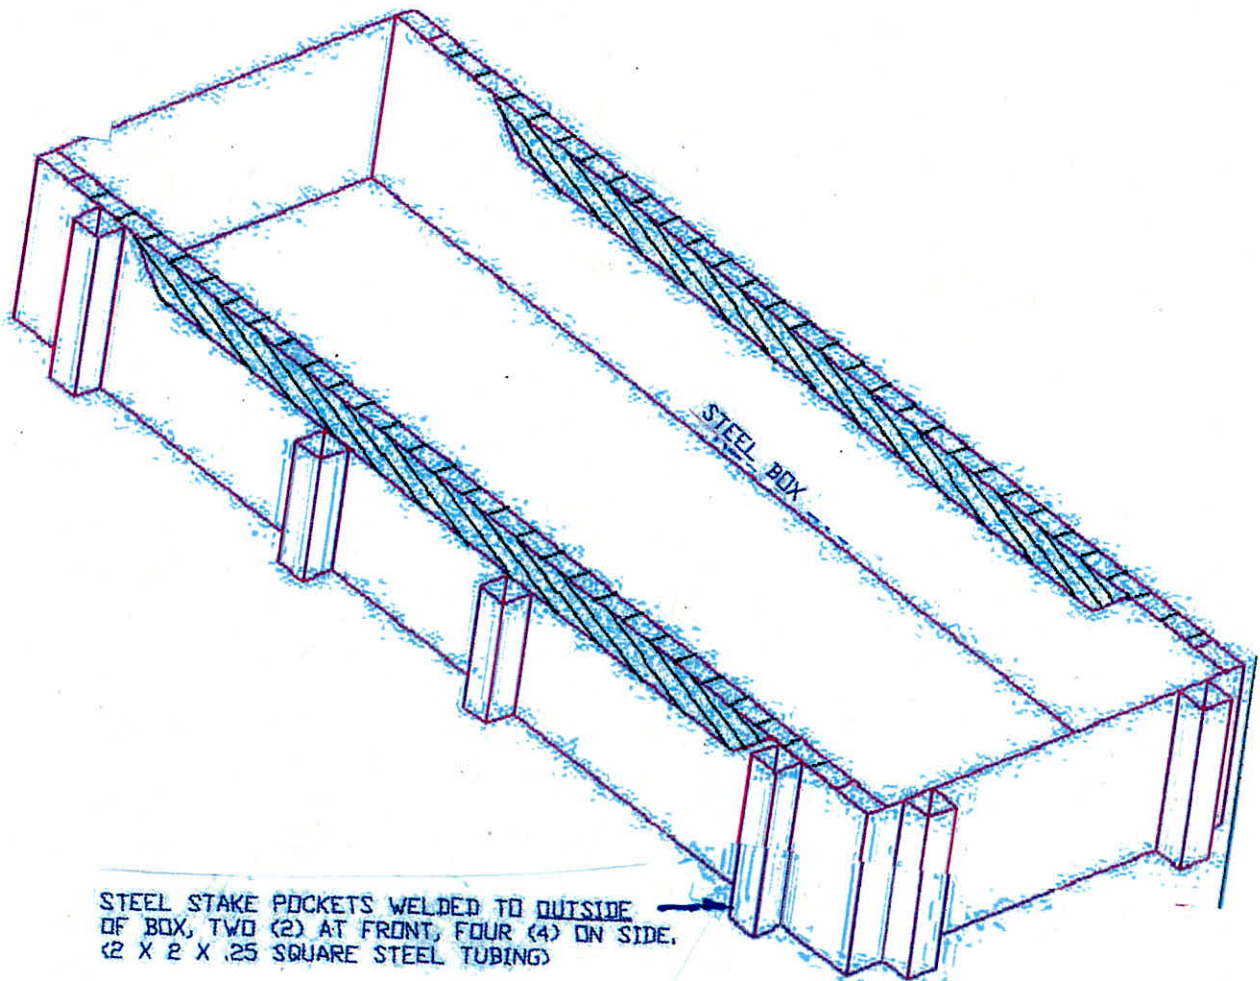


FRONT

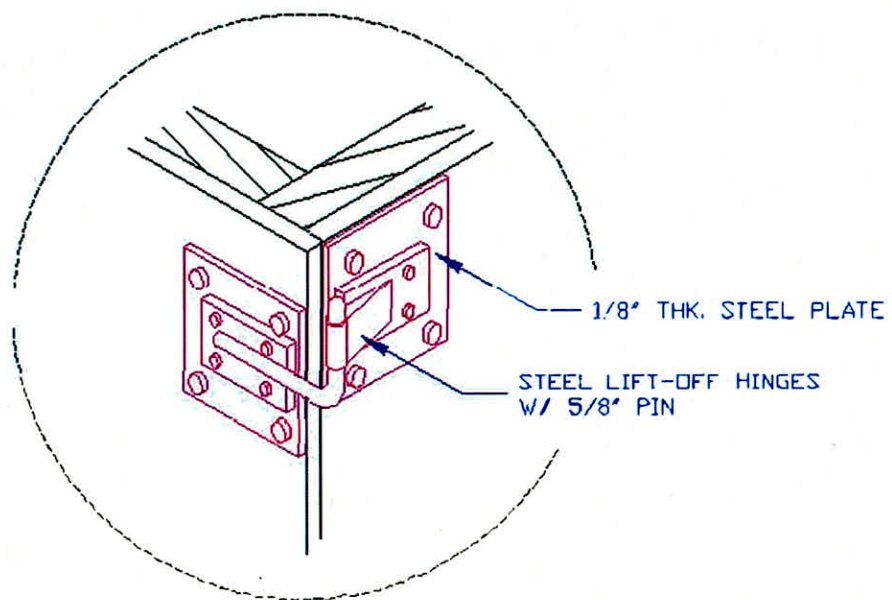

CORNER HINGE DETAIL

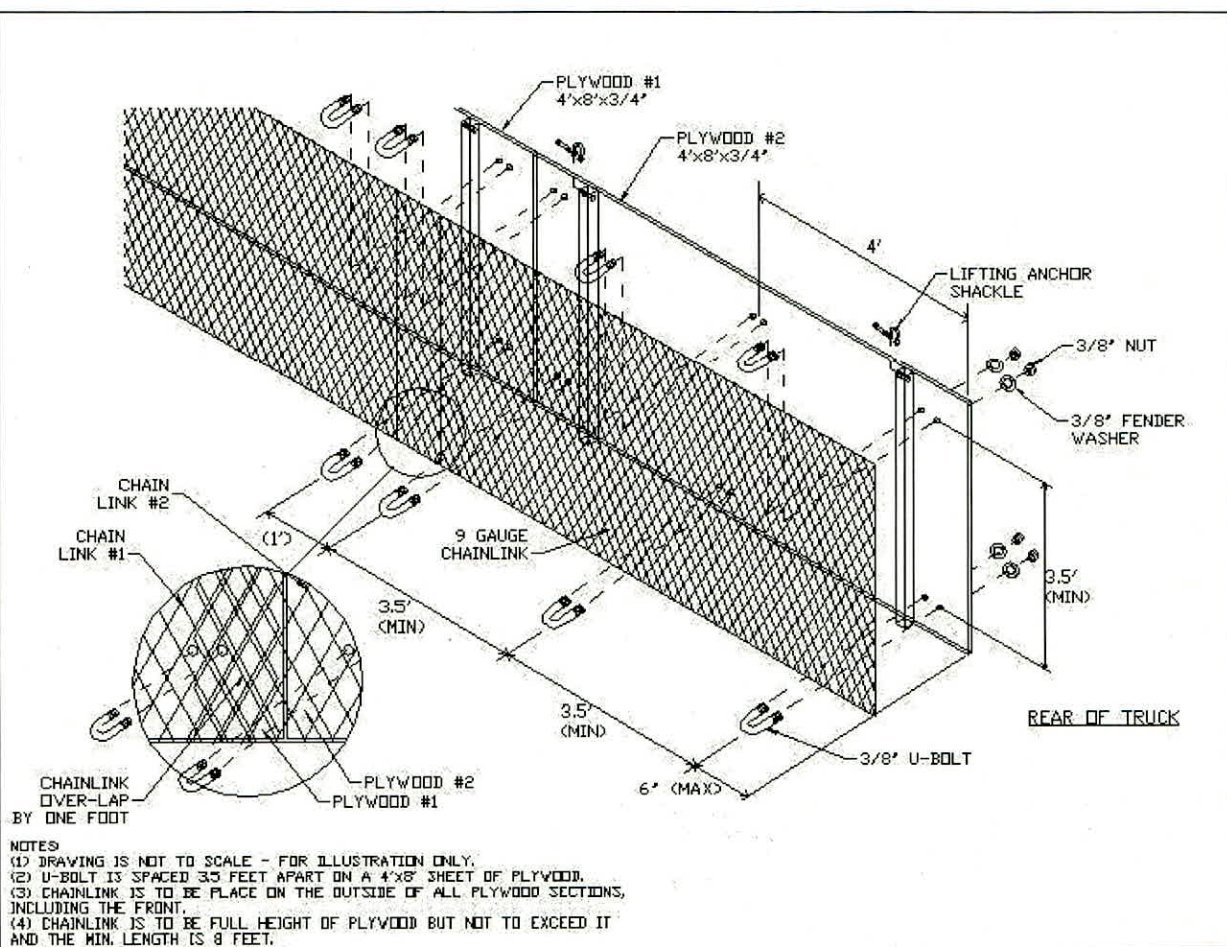

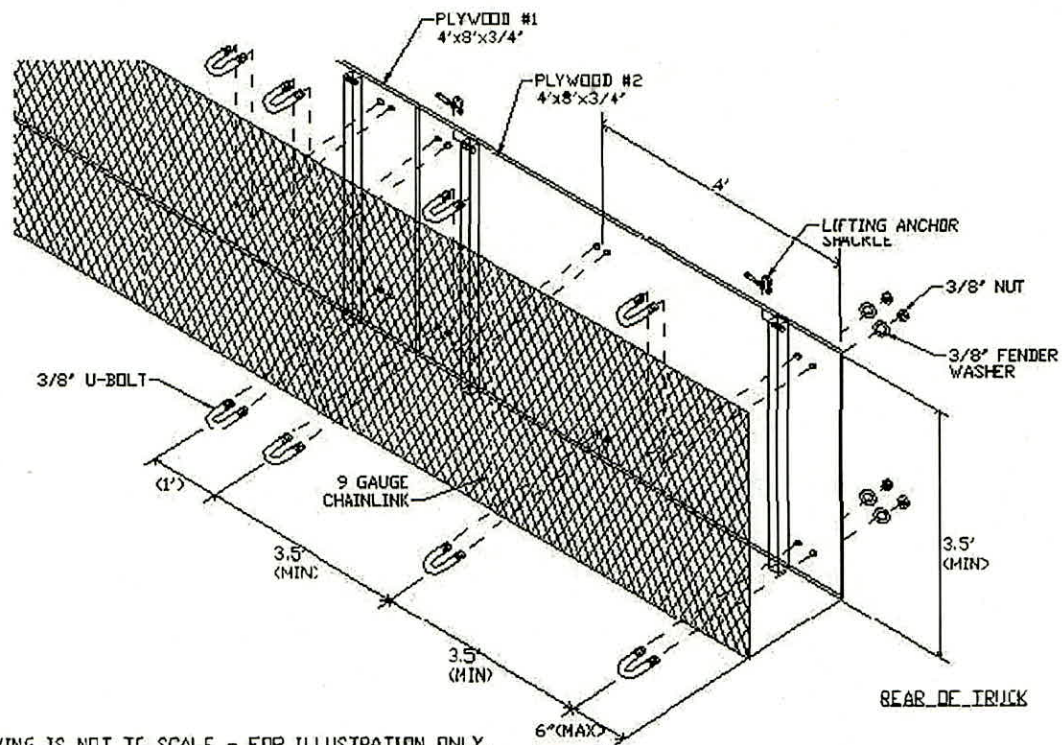

- NOTES:
- (1) DRAWING IS NOT TO SCALE - FOR ILLUSTRATION ONLY.
 - (2) CHAINLINK IS TO BE PLACED ON THE OUTSIDE OF ALL PLYWOOD SECTIONS, INCLUDING THE FRONT.
 - (3) THE CHAINLINK ON THE SIDE MUST BE CONTINUOUS.
 - (4) CHAINLINK IS TO BE FULL HEIGHT OF PLYWOOD BUT NOT TO EXCEED IT.
 - (5) U-BOLT IS SPACED 3.5 FEET APART ON A 4'x8' SHEET OF PLYWOOD.